
Direct Simulation of a Turbulent Boundary Layer up to $R_{\Theta} = 1410$

Philippe R. Spalart

(NASA-TM-89407) DIRECT SIMULATION OF A
TURBULENT BOUNDARY LAYER UP TO
R(SUB)(THETA) = 1410 (NASA) 51 P CSCL 20D

N87-18030

Unclas

G3/34 43301

December 1986



National Aeronautics and
Space Administration

Direct Simulation of a Turbulent Boundary Layer up to $R_{\theta} = 1410$

Philippe R. Spalart, Ames Research Center, Moffett Field, California

December 1986



National Aeronautics and
Space Administration

Ames Research Center
Moffett Field, California 94035

Direct simulation of a turbulent boundary layer up to $R_\theta = 1410$

By **PHILIPPE R. SPALART**

NASA Ames Research Center, Moffett Field, California 94035, USA

The turbulent boundary layer on a flat plate, with zero pressure gradient, is simulated numerically at four stations between $R_\theta = 225$ and $R_\theta = 1410$. The three-dimensional time-dependent Navier-Stokes equations are solved using a spectral method with up to about 10^7 grid points. Periodic spanwise and streamwise conditions are applied, and a multiple-scale procedure is applied to approximate the slow streamwise growth of the boundary layer. The flow is studied, primarily, from a statistical point of view. The solutions are compared with experimental results. The scaling of the mean and turbulent quantities with Reynolds number is examined and compared with accepted laws, and the significant deviations are documented. The turbulence at the highest Reynolds number is studied in detail. The spectra are compared with various theoretical models. Reynolds-stress budget data are provided for turbulence-model testing.

1. Introduction

The behavior of turbulent boundary layers is far from being fully understood, and accurate predictions are difficult except in the simplest cases. Scaling laws have been proposed and validated by measurements. They include the "law of the wall", the "defect law" or "law of the wake", and the "log law". Other scaling laws, such as Kolmogorov's, can apply but are not specific to wall-bounded flows. The scaling laws express our understanding of the mechanics of turbulent flows. They are also constantly used to extrapolate results from one Reynolds number to the other. This is necessary because the Reynolds numbers encountered in practical applications are much higher than can be reached in laboratory experiments or in direct numerical simulations.

The theoretical foundation of the laws is often fragile; for instance several interpretations have been given for the "log law". This is troublesome when one attempts to generalize the laws, either to more complex flows (e.g., pressure gradients) or to other quantities (e.g., higher statistical moments). The different interpretations, which agree in simple cases, may conflict in the general case. Often the available measurements are not accurate enough to indicate which theory is correct, and there is no consensus. Furthermore the theories are usually unable to predict the value of the universal constants (e. g., the Karman and Kolmogorov constants). For the theory of turbulent boundary layers, see in particular

Coles (1956) and Townsend (1956, 1976).

Another area of controversy is the behavior of the flows at low Reynolds numbers. This is the range of Reynolds numbers for which the flow is turbulent but does not have a very wide range of scales. It is turbulent in the sense of having fluctuations with significant energy, which is sustained by a transfer from the mean flow. The fluctuations have a strong effect on the mean flow through the Reynolds stresses they generate. On the other hand the range of scales is not wide enough for many widely-used arguments, which are based on the separation of large and small scales, to apply. Typical examples are the inertial range in the spectrum of small-scale turbulence and the log layer near a wall; both properties vanish when the Reynolds number is too low. Unfortunately, all direct numerical simulations to date fall into the range of "low-Reynolds-number turbulence". This makes the interpretation of the results delicate; it is often hard to tell whether a result is close to the asymptotic high-Reynolds-number value, or even whether a finite asymptotic value exists. One needs to distinguish between "Reynolds-number effects" and "low-Reynolds-number effects". In an effort to achieve this distinction in the present study, particular care was taken to prevent spurious numerical effects. The simulations also cover a rather wide range of Reynolds numbers (a factor of 4), and the results suggest that in the $R_\theta = 1410$ flow the low-Reynolds-number effects are quite weak. For low-Reynolds-number effects see in particular Coles (1962), Head and Bandyopadhyay (1981), Purtell, Klebanoff and Buckley (1981), Murlis, Tsai and Bradshaw (1982) and Erm, Smits and Joubert (1985).

In experimental studies, Reynolds numbers large enough to ensure scale separation are easily reached; for instance "long" inertial ranges and log layers have been measured. On the other hand some quantities, such as the pressure fluctuations within the flow, are very difficult to measure. Measurements on small scales are also difficult, especially very close to a solid wall. Thus, experimental and numerical studies complement each other and will both be needed in the foreseeable future. Direct and large-eddy simulations of turbulence were reviewed by Rogallo and Moin (1984). In the field of wall-bounded flows, Deardorff (1970) and Schumann (1975) studied turbulent channel flow by large-eddy simulation, without resolving the viscous wall region. Moin and Kim (1982) did a large-eddy simulation and could resolve the wall region; they obtained close agreement with the well-known law of the wall. Moser and Moin (1984) performed a direct simulation of (curved) turbulent channel flow. In contrast to large-eddy simulations, direct simulations do not include modeling of the eddies smaller than the grid spacing. This limits them to lower Reynolds numbers, but the results are thought to be more reliable, especially close to the wall (Moser and Moin 1984). Spalart and Leonard (1985) presented direct simulations of boundary layers with a range of pressure gradients. These studies did not emphasize the Reynolds-number dependence of the turbulent quantities and relied heavily on wall scaling (based on the friction velocity u_τ and the kinematic viscosity ν) to present the results and compare them with experiments.

In addition to theoretical results like the scaling laws, fundamental turbulence research is expected to provide quantitative information for the calibration of turbulence models. These models are needed for the prediction of practical flows; their present accuracy leaves much room for improvement. From an accurate direct simulation, one can extract all the quantities that are involved in a turbulence model of any complexity. This provides a complete test of the model and leads to suggestions about how to improve it. Here

one is making the assumption that the extrapolation is possible not only to different Reynolds numbers, but also to more complex geometries. The present study focusses on conventional, statistical measures of turbulence. The modern concepts of coherent structures in turbulence are not ignored, but the open questions regarding the behavior of quantities as simple as the mean velocity and the Reynolds stresses are more urgent both from a theoretical point of view (scaling laws) and from a practical point of view (turbulence models). They are also more likely to have durable answers.

The method used for this study was applied to equilibrium boundary layers with pressure gradients by Spalart and Leonard (1985) and to sink-flow boundary layers by Spalart (1986b). In both studies the flows were *assumed*, locally, to satisfy similarity properties both in the wall region (law of the wall) and in the outer region (defect law). Self-similarity was assumed both for the mean velocity and for the Reynolds stresses. These assumptions are reasonable, but are strongly justified only in the case of the sink flow. In fact when Spalart and Leonard compared simulations (with zero pressure gradient) at different Reynolds numbers, it was found that some of the scaling laws were not satisfied. Thus the study as a whole was inconsistent (since the global behavior of the flow negated the assumptions that were made locally). The deviations from the scaling laws were especially striking near the wall, where the terms which depend on the similarity assumptions are very weak. Therefore it was expected that even if these terms were altered to remove the inconsistency, the results would not change significantly and the deviations would remain.

This finding motivated a generalization of the approach and a systematic, controlled study of the Reynolds-number effects. The new approach makes no assumption about the behavior of the dependent variables. The outer and inner length scales δ and ν/u_τ are still used to define a transformation in the direction normal to the wall, but as this is a much weaker assumption it can only have an indirect effect on the results. The procedure will be described in §2.3. Although it has much in common with the procedures used by Spalart and Leonard (1985) and Spalart (1986b) a self-contained account of the method will be given.

The numerical method was described in detail by Spalart (1986a). It is fully spectral in space, based on Fourier series in the directions parallel to the plate and an exponential mapping with Jacobi polynomials in the normal, semi-infinite direction. The time integration is second-order accurate and hybrid; it uses a Runge-Kutta scheme for the transport term and the Crank-Nicolson scheme for the Stokes terms. If Reynolds-number effects are to be studied by numerical simulation, it is essential to ensure that the different cases are not run with (effectively) different resolution, which could induce spurious variations. A similar problem can occur in experiments, for instance if a probe of fixed size is used while an increase in the Reynolds number decreases the scales of the turbulence.

There are two aspects to the question of resolution. One is the size of the periods in the directions parallel to the wall (or equivalently the smallest wave number). It was decided to keep the ratio of these periods to the displacement thickness δ^* the same in all the simulations. Thus if there is an effect of the confinement of the flow inside a finite period, the effect will be as independent of Reynolds number as possible. The displacement thickness is an appropriate macroscale of the flow and is used because, with the present method, it is easier to control than the boundary-layer thickness δ or the momentum thickness θ . The length scale y_0 of the exponential mapping (Spalart 1986a) is also kept

at a constant multiple of δ^* .

The other aspect is of course the grid spacing (or equivalently the largest wave number). In this case the wall region is the most sensitive and it was decided that the grid spacing, in wall units, should be independent of Reynolds number. Therefore the number of points in each periodic direction is roughly proportional to the Reynolds number. In the normal direction the number of points was chosen in each case such that the 10^{th} point is less than 9 wall units away from the wall. Thus the effects of numerical truncation will be as independent of Reynolds number as possible.

2. Governing equations

2.1. Multiple-scale approximation

The overall goal is to obtain a set of equations which, when solved with periodic conditions in the streamwise (x) direction, can provide a good approximation to the local state of a boundary layer that has a slow spatial development. As discussed by Spalart (1986b) the incentives to use periodic conditions are both numerical (the high accuracy of Fourier series) and physical (no need to provide turbulent inflow conditions). The idea is to use the fact that both the thickness of the boundary layer and the energy level of the turbulence vary slowly as functions of x , as illustrated in figure 1. The final product is a set of small "growth terms" that are added to the usual Navier-Stokes equations.

Figure 1a is a sketch of the flow, with the normal direction (y) enlarged about 10 times. The velocity profiles at two stations illustrate the thickening of the boundary layer. The solid lines represent streamlines of the mean velocity field, which are at a shallow angle to the wall. The dashed lines represent a coordinate system that is "fitted" to the boundary layer. The periodic conditions will be applied along these lines. A new coordinate η (which is constant along a dashed line) replaces y as the normal coordinate; it is chosen so that the boundary-layer thickness and the viscous-sublayer thickness are independent of x . In the sink flow the coordinate lines were obvious: they were the rays converging into the sink. In the general case the choice is more arbitrary and will be discussed in §2.2 and 2.3. In terms of geometry, the key quantity is the slope S of the coordinate lines. In the constant-pressure boundary layer, as indicated in figure 1a, S is positive and small, although larger than the slope of the streamlines.

The dependent variables also require a change of variables before periodic conditions are applied. Figure 1b is a sketch of a turbulent velocity component, for instance u , vs. x . The signal displays fast, short-scale, apparently random fluctuations as well as a slow variation of the mean and of the intensity of the fluctuations with x . This variation makes periodic conditions inadequate. However if one writes u as the combination

$$u(x, \eta, z, t) = U(x, \eta) + A(x, \eta)u_p(x, \eta, z, t) \quad (1)$$

where U is the mean (over the spanwise direction z and time t) and the "amplitude function" A is proportional to the rms of the fluctuations, then the normalized signal u_p has zero mean and its rms is independent of x . This makes periodic conditions for u_p appear

tolerable although not fully justified. They are not fully justified because the length- and time scales of the signal may vary with x , so that even u_p is not a truly homogeneous signal. However in a boundary layer, the variation of these scales is presumed to be slow and to have a weaker effect than the variation of the mean and rms.

Differentiating (1) with respect to x yields

$$\frac{\partial u}{\partial x} = \frac{\partial U}{\partial x} + A \frac{\partial u_p}{\partial x} + \frac{\partial A}{\partial x} u_p. \quad (2)$$

Since the variation of U and A with x is assumed to be slow, the first and third terms appear as small corrections, “slow derivatives”, denoted by U_X and u_X . The second term, the usual or “fast” derivative $\partial u_p / \partial x$, is denoted by u_x . The formulas for U_X and u_X will be discussed in §2.3.

2.2. Short-scale analysis

The short-scale analysis includes the transformation of the Navier-Stokes equations from the Cartesian system of coordinates (x, y, z) to the non-Cartesian system (x, η, z) , the inclusion of the slow derivatives, and the Taylor expansion of the resulting equations. The metric coefficients S and T of the coordinate transformation are defined by

$$\begin{pmatrix} dx \\ dy \end{pmatrix} \equiv \begin{pmatrix} 1 & 0 \\ S & T \end{pmatrix} \begin{pmatrix} dx \\ d\eta \end{pmatrix}. \quad (3)$$

S has a clear physical meaning: it is the slope made by the new coordinate lines with the wall. The meaning of η and T is not as clear, since they depend on a normalization. In the end the normalization will be chosen so that, at the value of x being considered, η and y coincide, giving $T = 1$. Until then the identity $T_x = S_\eta$ will be used to express the results in terms of S as much as possible.

Let (u^*, v^*, w^*) be the Cartesian velocity components. The contravariant velocity components $(\tilde{u}, \tilde{v}, \tilde{w})$ associated with (x, η, z) are used to preserve the form of the transport terms, that is to have $u^* \partial_x + v^* \partial_y + w^* \partial_z = \tilde{u} \partial_x + \tilde{v} \partial_\eta + \tilde{w} \partial_z$. They are defined by $\tilde{w} = w^*$ and

$$\begin{pmatrix} \tilde{u} \\ T\tilde{v} \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ -S & 1 \end{pmatrix} \begin{pmatrix} u^* \\ v^* \end{pmatrix}. \quad (4)$$

The continuity condition ($u_x^* + v_y^* + w_z^* = 0$) becomes

$$\tilde{u}_x + \tilde{v}_\eta + \tilde{w}_z + \frac{S_\eta}{T} \tilde{u} + \frac{T_\eta}{T} \tilde{v} = 0. \quad (5a)$$

The x -momentum equation becomes

$$\begin{aligned} \tilde{u}_t + \tilde{u} \tilde{u}_x + \tilde{v} \tilde{u}_\eta + \tilde{w} \tilde{u}_z = -p_x + \frac{S}{T} p_\eta + \\ \nu \left(\tilde{u}_{xx} + \frac{1+S^2}{T^2} \tilde{u}_{\eta\eta} - \frac{2S}{T} \tilde{u}_{x\eta} + \left(-\frac{S_x}{T} + \frac{2SS_\eta}{T^2} - \frac{(1+S^2)T_\eta}{T^3} \right) \tilde{u}_\eta + \tilde{u}_{zz} \right) \end{aligned} \quad (5b)$$

where p is the kinematic pressure. Similar terms enter the other equations. Now that all the derivatives have been taken, the normalization can be applied, which will simplify the equations: η is identified to y and T is set to 1. The equations become

$$\tilde{u}_x + \tilde{v}_y + \tilde{w}_z + S_y \tilde{u} = 0, \quad (6a)$$

$$\tilde{u}_t + \tilde{u}\tilde{u}_x + \tilde{v}\tilde{u}_y + \tilde{w}\tilde{u}_z = -p_x + Sp_y + \nu(\tilde{u}_{xx} + (1+S^2)\tilde{u}_{yy} - 2S\tilde{u}_{xy} + (SS_y - S_x + SS_y)\tilde{u}_y + \tilde{u}_{zz}). \quad (6b)$$

Let us proceed with the Taylor expansion of the equations. The velocity and pressure are split into mean and fluctuating quantities: e. g., $\tilde{u} = U + u$, and the fast and slow derivatives defined by (2) are introduced. The friction velocity u_τ/U_∞ is a small quantity and tends to 0 (although slowly) as the Reynolds number tends to ∞ . Let u_τ/U_∞ be of order ϵ . The velocity fluctuations u, v, w are of the same order. The pressure fluctuations p/U_∞^2 are of order ϵ^2 . The momentum equation, $d\theta/dx = u_\tau^2/U_\infty^2$, shows that the rate of change of the boundary-layer thickness δ in the x direction is of order ϵ^2 . Then S and $\delta A_X/A$ are of order ϵ^2 . All of the slow derivatives such as U_X and u_X are two orders of magnitude smaller than the quantity itself, whereas the fast derivatives are of the same order as the quantity (taking δ as the length scale). For instance $u/U_\infty = O(\epsilon)$, $u_x\delta/U_\infty = O(\epsilon)$, $u_X\delta/U_\infty = O(\epsilon^3)$. The Taylor expansion of (6) up to order ϵ^3 is as follows (note that in each equation the leading terms are of order ϵ , so that the relative order of the corrections is ϵ^2).

$$V_y + [U_X + S_y U] = 0, \quad (7a)$$

$$u_x + v_y + w_z + [u_X + S_y u] = 0, \quad (7b)$$

$$u_t + (U + u)u_x + v(U + u)_y + wu_z + [UU_X + VU_y + Uu_X + U_Xu + Vu_y] = -p_x - [P_X] + \nu(U_{yy} + \nabla^2 u), \quad (7c)$$

$$v_t + (U + u)v_x + vv_y + wv_z + [Uv_X + (V_y + 2US_y)v + Vv_y] = -p_y + \nu\nabla^2 v, \quad (7d)$$

$$w_t + (U + u)w_x + vw_y + ww_z + [Uw_X + Vw_y] = -p_z + \nu\nabla^2 w. \quad (7e)$$

The corrections in the viscous terms have been neglected. The mean and fluctuating components of the continuity equation are separated for clarity (7a, 7b) and all three components of the momentum equation are shown. These equations are the Navier-Stokes equations, as usually written for a shear flow that is homogeneous in x and z , with the addition of "growth terms" that are indicated by square brackets and can be interpreted as follows. The term $U_X + S_y U$ in the continuity equation (7a) is a consequence of the streamwise evolution of the mean-velocity profile. In the sink flow, it was identically zero (Spalart 1986b). In the flat-plate flow, it is zero in the wall layer and positive farther from the wall, so that V becomes negative: nonturbulent fluid is entrained into the boundary layer (in the new coordinates the dashed lines of figure 1a are parallel and the solid lines are directed towards the wall). The meaning of the $u_X + S_y u$ term in (7b) is not as clear (it was zero in the sink flow as well). Actually the numerical method used, which employs basis functions that satisfy $u_x + v_y + w_z = 0$ (causing the pressure term to be eliminated), does not allow the $u_X + S_y u$ term to be included. Thus the expansion is not fully third-order accurate in ϵ , but this effect is not thought to be very significant (the integrated contribution of the pressure term to the turbulence energy is of order ϵ^5 while the production term, for instance, is of order ϵ^2). In the momentum equation, the terms $UU_X + VU_y$ and P_X are mean momentum-transport and pressure terms. The term P_X is

independent of y , to order ϵ^3 , and satisfies Bernoulli's equation in the freestream: for large y , $UU_X = -P_X$ (in the present application, $P_X = 0$). The terms $Uu_X + Vu_y$, $Uv_X + Vv_y$, and $Uw_X + Vw_y$ represent transport, or advection, of the turbulence by the mean flow. The term $2US_yv$ in (7d), which is due to the expansion of the coordinate lines, seems harder to interpret.

Finally, the terms U_Xu and V_yv arise from the straining of the turbulence by the mean flow. However it would be misleading to imply that straining is accurately represented, because the numerical domain does not become deformed in time as in, for instance, Rogallo's homogeneous-turbulence simulations (1981). This weakness of the present approach is, ultimately, due to the fact that the approximation in (1) was based purely on energy considerations, without consideration of structural aspects. If one examines the influence of S , one finds that the mean growth term $UU_X + VU_y$ is not sensitive to S , because of the definition of the contravariant velocities \tilde{u} and \tilde{v} (if S changes, the quantities UU_X and VU_y change, but their sum remains equal to $U^*U_x^* + V^*U_y^*$). For the fluctuations the situation is more subtle. It can be shown that the global effect on a Reynolds stress such as $\langle u^2 \rangle$ behaves like the effect on the mean flow, that is, a change in S causes only a transfer between the terms $U \langle u^2 \rangle_X$ and $V \langle u^2 \rangle_y$. However, locally the value of S does matter because u_X and u_y do not have the same phase. It is not obvious that the equations (7(a-e)), which were derived entirely using Reynolds-averaged concepts, will have the right effect on the flow structures. The production of turbulent energy due to the mean shear U_y is well represented (it does not depend on the spatial development). The entrainment process by which irrotational fluid is absorbed into the turbulent region seems to be well represented, even locally. On the other hand, it is unlikely that flows in which a straining associated with the spatial development is dominant would be simulated very accurately. Flows in which length or time scales evolve rapidly in the x direction should also be avoided, as mentioned earlier.

2.3. Long-scale analysis

The long-scale analysis provides the values of the quantities S , U_X , u_X , v_X , and w_X that enter the growth terms in (7). In the method used for sink-flow boundary layers (Spalart 1986b) the long-scale analysis was simple; the flow was assumed to be self-similar both in terms of its length scales (all proportional to the distance X_0 from the sink) and its velocity scales (all proportional to the edge velocity Q/X_0). Thus one had the equations $S = -y/X_0$, $U_X = U/X_0$, $u_X = u/X_0$, and so on.

In more general flows one has to consider at least two length scales: the wall length scale ν/u_τ and the boundary-layer thickness δ . There are also two velocity scales: the friction velocity u_τ and the edge velocity U_∞ . Spalart and Leonard's (1985) study of boundary layers with pressure gradients was restricted to "equilibrium" boundary layers in the sense used by Clauser (1954), in which the outer part of the velocity profile, expressed as a defect and normalized by u_τ , is a function only of y/δ . This is the "defect law". The wall region was also assumed to display the universal property known as the "law of the wall". Thus the natural coordinate η was (a function of) y^+ in the wall region and (a function of) y/δ in the outer region. A smooth blending between the two regions was made. The fluctuations were assumed to scale with u_τ both in the wall region (for constant y^+) and in

the outer region (for constant y/δ). This assumption was consistent with the assumption made for the mean velocity and with the literature.

Spalart and Leonard's analysis has several shortcomings. It is limited to "equilibrium" boundary layers; such boundary layers are not only rare in practice, they are also not rigorously defined. The "constant β " definition (Clauser 1954) is not fully justified. It was also shown by Coles (1962) that even in the simplest and best explored of equilibrium boundary layers, the constant-pressure flow, the defect law is not satisfied at low Reynolds numbers, such as the one used for the simulations. Also, the overlap of a law of the wall and an outer-layer law requires a log layer in the mean velocity and a constant layer in the Reynolds stresses. The log layer was obtained by Spalart and Leonard, but the constant-stress layer was not. Although this could be a low-Reynolds-number effect, it is hard to explain why the log layer was well indicated at the same Reynolds number. Finally, simulations conducted at different Reynolds numbers yielded results in which the Reynolds stresses, near the wall, did not scale with u_τ and y^+ . Instead they showed a consistent tendency to rise with the Reynolds number.

These various shortcomings indicated that (except for the sink flow) a valid study of boundary layers at low Reynolds numbers or with general pressure gradients should do away, at least, with the assumptions of a defect law and of the wall scaling of the Reynolds stresses. This led to the idea of obtaining the information needed to prescribe S , U_X , and so on, not from some assumptions but directly by conducting simulations at several stations of the same boundary layer. The X -derivatives are obtained by taking differences between the different stations. This approach is more general, and is conceptually simpler. On the other hand it is more expensive, since several simulations have to be conducted. Also, the simulation of any one station requires upstream information. Thus one loses one of the advantages of the original procedure; however, the upstream information needed is reduced to mean-velocity and Reynolds-stress profiles. Time-dependent turbulent inflow values are not needed.

The first task is to define the coordinate lines. The quantities y^+ , near the wall, and y/δ , away from the wall, appear as natural coordinates. The idea is to minimize the nonhomogeneity along a constant- η line, so that the growth terms are as small as possible. The new coordinate η is defined explicitly as a weighted average:

$$\eta \equiv \frac{y_2^p(10^{-3}y^+) + y^p(y/\delta)}{y_2^p + y^p} \quad (8)$$

where $y_1^+ \equiv 15$, $y_3/\delta \equiv 0.3$, $y_2 \equiv \sqrt{y_1 y_3}$ and $p \equiv 5/\log_{10}(y_3/y_1)$. This rather arbitrary definition was chosen to ensure that η is a monotonic function of y , is equal to $10^{-3}y^+$ for small y and to y/δ for large y , and makes a smooth transition between the two.

Now that η is defined, if one knows the state of the flow at two values of X , e. g., X_1 and X_2 , one computes an approximation to $S \equiv \partial y/\partial X$ by taking differences:

$$S \approx \frac{y(X_2, \eta) - y(X_1, \eta)}{X_2 - X_1} \quad (9)$$

Typically the flow at the upstream station, X_1 , is known from a previous simulation and the flow at the downstream station, X_2 , is being computed. Similarly U_X is approximated by

$[U(X_2, \eta) - U(X_1, \eta)] / (X_2 - X_1)$. For u , A_X is given by $[u_{rms}(X_2, \eta) / u_{rms}(X_1, \eta) - 1] / (X_2 - X_1)$, and the formula for w is the same. Finally, the formula for v is slightly different: $A_X \approx [v_{rms}(X_2, \eta) / v_{rms}(X_1, \eta) - 1] / (X_2 - X_1) - S_y$. The $-S_y$ term is introduced by the normalization of \tilde{v} in (4). This cancels half of the $2US_y v$ term of (7d). The only information one needs at X_1 is U , u_{rms} , v_{rms} and w_{rms} as a function of y . During the transient regime, one can use the values of U , u_{rms} , and so on, at X_2 at one time step to evaluate the growth terms for the next step. No stability problems were encountered.

3. Results

3.1. Choice of the parameters

The periods in the x and z directions are $\Lambda_x = 100\delta^*$ and $\Lambda_z = 25\delta^*$. The spacing between collocation points, in wall units, is $\Delta x^+ \approx 20$, with $\Delta z^+ \approx 6.7$, and may vary by $\pm 5\%$ from one case to another. In the y direction, as mentioned earlier, the number of points is adjusted so that there are 10 (nonuniformly spaced) points within 9 wall units of the wall. As a result of these requirements and of the need to factorize the length of the fast Fourier transforms, the number of points in the x , y , and z directions is $(128 \times 50 \times 96)$ at $R_{\delta^*} = 500$, $(256 \times 64 \times 192)$ at $R_{\delta^*} = 1000$ and $(432 \times 80 \times 320)$ at $R_{\delta^*} = 2000$. This last case has about 1.1×10^7 grid points, so 3.3×10^6 modes, (using the 2/3 rule in each direction, Spalart 1986a). The time step is adjusted so that the maximum local Courant-Friedrichs-Levy (CFL) number (see Spalart 1986a for the exact definition) is 2. As a result the nondimensional time step $\Delta t U_\infty / \delta^*$ is about 0.3, 0.14, and 0.07 at $R_{\delta^*} = 500$, 1000, and 2000 respectively. In wall units, the nondimensional time step $\Delta t u_\tau^2 / \nu$ is about 0.43, 0.32, and 0.29 respectively. The time sample for the statistics is of the order of $200\delta^* / U_\infty$. Larger samples would help improve the smoothness of the spectra, but would be very expensive to generate.

These values were chosen by monitoring the spectra, both at their lower end (to choose the period) and at their upper end (to choose the grid spacing). Alternatively, the two-point correlations can be used (Spalart 1986a). Two tests were also performed for the (relatively inexpensive) case $R_{\delta^*} = 500$ to further validate the choice of the parameters. In the first test, the values of Λ_x and Λ_z were doubled, then halved, and the grid spacing left unchanged (thus the number of points in x and z also changed by a factor of 2). In the second test, the simulation was rerun with both much finer, and then much coarser resolution (the number of points in x and z was doubled, then halved; the number of points in y was varied from its basic value of 50 to 64, then 40). Since the time step is always regulated by the value of the CFL number, it is also reduced when finer resolution is used, so that both the spatial and temporal errors are reduced.

Figure 2 displays the sensitivity of the mean-velocity profile to the numerical parameters. The difference between the basic simulation and the ‘‘improved’’ ones (larger periods or finer resolution) is small. This figure allows one to estimate the remaining numerical uncertainty. On the other hand, the simulation with coarse resolution gives significantly different results, including a much higher value of u_τ / U_∞ . Thus the resolution chosen

appears to be adequate, but not wasteful. Finally, the simulation with reduced periods gives results very close to the basic simulation, which indicates that the periods that were chosen to obtain satisfactory long-range behavior (low correlations at a distance $\Lambda/2$) are more than sufficient to obtain a satisfactory velocity profile. The sensitivity of other statistical quantities up to third-order moments was also found to be small. For fourth-order moments, the u and w components showed a moderate sensitivity, but the flatness factor of v was very sensitive near the wall: it varied from about 4 with coarse resolution to over 30 with fine resolution. Away from the wall, the profiles agreed well again, even the v -flatness. Thus one should consider statistics for moments beyond third order with some caution, at least near the wall.

3.2. Streamwise evolution of the mean flow and the shear stress

Four stations of the boundary layer were simulated, with $R_{\delta^*} = 400, 500, 1000,$ and 2000 respectively. The values of R_{θ} are approximately 225, 300, 670, and 1410. Detailed results from the first station, $R_{\delta^*} = 400$, will not be shown. It was computed using the approach of Spalart and Leonard (1985). While this approach was shown to have some deficiencies, it is satisfactory for the generation of inflow data. A "normal" turbulent boundary layer was obtained except for exaggerated low-Reynolds-number effects.

The possibility of sustaining turbulence at $R_{\theta} = 225$ is in disagreement with Preston's (1957) estimate that the lowest Reynolds number at which "fully developed turbulent flow" can occur is 320. It is based on a comparison between pipe-flow and boundary-layer data, and on the rather abstract argument that when the length of the log layer is reduced to zero (because the inner and outer regions overlap), fully developed turbulence cannot exist. One may need to distinguish between the concepts of "fully developed" turbulence and of "sustained" turbulence. Indeed, in the present results for R_{θ} below about 600, a normal log layer is not observed (see below). However the turbulence was sustained. A comparison with sink-flow boundary layers may be useful. These flows were also studied with the present method (Spalart 1986b). The threshold Reynolds number was found to be $R_{\theta} = 330$, which is in good agreement with experimental data. In sink-flow simulations, the turbulence quickly collapsed when the Reynolds number was lowered to below 330; thus the present method seems reliable. The sink flow has a strong favorable pressure gradient, which has a stabilizing effect (it is known to inhibit transition and to induce relaminarization). When this stabilizing effect is removed, turbulence should be sustained at lower Reynolds numbers. Curiously, Preston's argument about the overlap of the inner and outer region predicts the opposite effect: the limit would be lower with a favorable pressure gradient. Thus Preston's estimate for the sink flow would be significantly lower than the value of 330, which has now been obtained by two independent approaches.

Figure 3 shows the growth of the displacement- and momentum thicknesses in the streamwise direction. Since the origin is arbitrary in the x direction, the notation ΔR_x is used to represent the Reynolds number based on the distance from the inflow station and on U_{∞} . The scale is enlarged in the normal direction. The momentum-balance equation, $d(R_{\theta})/d(R_x) = c_f/2$, is checked by drawing segments centered on the R_{θ} points with a slope of $c_f/2$. They show that the balance equation is well satisfied and that the spacing between stations is small enough. In figure 4 the dependence of the friction coefficient c_f

and the shape factor $H \equiv \delta^*/\theta$ on R_θ is shown; it compares well with experimental data (Coles 1962, Purtell *et al.* 1981, Murlis *et al.* 1982, Erm *et al.* 1985). However as R_θ increases, the c_f decreases slightly less than the experiments show. Figure 2 suggests that the uncertainty on U_∞/u_τ is of the order of ± 0.25 , or $\pm 1.25\%$. This translates into $\pm 2.5\%$, or ± 0.12 , for $10^3 c_f$, which is of the same order as the differences in figure 4a (for $R_\theta = 670$ and larger). The $R_\theta = 1410$ simulation was continued with slightly improved resolution (96 points in y instead of 80); the c_f showed no tendency to decrease. The error could also be caused by effects neglected in the multiple-scale approximation; unfortunately it does not seem possible to estimate these effects quantitatively.

The velocity profiles are plotted in figure 5a using wall variables. Experimental results at $R_\theta = 617$ (Erm *et al.* 1985) and 1368 (Murlis *et al.* 1982) are also plotted and may be compared with the present results at $R_\theta = 670$ and 1410. For R_θ equal to 670 and larger, the profiles closely follow the logarithmic law $U^+ = \log(y^+)/\kappa + C$, with constants $\kappa = 0.41$ and $C = 5$, starting at $y^+ \approx 30$. For $R_\theta = 300$, the curve is significantly higher in that region; however it is still rather straight. This raises the question of exactly how the log layer is defined.

A logarithmic layer is a region in which the quantity $dU/d(\log y)$, or $y dU/dy$, is constant and equal to u_τ/κ . In high-Reynolds-number boundary layers, this region is long and bounded on both sides by regions in which $y dU/dy$ takes values *larger* than the constant. Thus the logarithmic layer and the value of u_τ/κ can be found by seeking the minimum of $y dU/dy$ vs y (this amounts to seeking the inflection point in figure 5a). The value of C can then be determined at the same position. This seems to be the only rigorous definition. The usual procedure of adjusting κ and C until the straight line fits the velocity profile “well” in the coordinates of figure 5a is not exempt from arbitrariness. Of course, the procedure based on $y dU/dy$ is more sensitive to noise, and will yield an erroneously low value of u_τ/κ for noisy data (C may then be overpredicted). Thus it may not be applicable to experimental data. However, in numerical results, the mean-velocity profile shows a low level of noise once the sample is sufficient. The profiles of $y^+ dU^+/dy^+$ are shown in figure 5b and are seen to be smooth enough in the region of interest. Note that if the value of κ is assumed to be known, one can deduce the value of u_τ (and hence the wall stress) using only measurements in the log layer. This is essentially the method of the “Clauser plot” (Clauser 1954).

When the Reynolds number is low, the quantity $y dU/dy$ still exhibits a local minimum, but the minimum is narrow (figure 5b). Several interpretations are possible. The first is an “infinitely short” log layer. Figure 5b shows that at $R_\theta = 300$, this log layer has a low value of about 0.315 for the “apparent Karman constant” κ' . This is reminiscent of Simpson’s interpretation (1970), although Simpson made deductions from measurements taken in the outer region of the flow. He proposed the law $\kappa' = \kappa_0 (R_\theta/6000)^{1/8}$ with κ_0 the asymptotic value, about 0.40. This yields 0.28, 0.31, and 0.34 for our three cases. The present results indicate values of 0.315, 0.380, and 0.404 for κ' . They show a smaller departure of κ' from κ_0 , and the value of κ' is essentially unaffected down to $R_\theta \approx 670$. The apparent values C' , in the numerical results, are 2.51, 4.25 and 4.74 for the three cases. The uncertainty is estimated to be about ± 0.01 for κ' and ± 0.25 for C' .

The second interpretation is simply that the log layer exists at $R_\theta = 670$ but has disappeared at $R_\theta = 300$. The log layer normally covers the region between $y^+ \approx 30$ and

$y/\delta \approx 0.15$. These two positions coincide when $\delta^+ \approx 200$, which corresponds to $R_\theta \approx 400$. The wall and wake regions begin to overlap for R_θ lower than 400, so that the local minimum of $y^+ dU^+ / dy^+$ is reduced to a point and is higher than its normal value. The results shown in figure 5 imply that at $R_\theta = 300$, the Clauser-plot method yields an erroneously high "apparent friction velocity" u'_τ if the decrease in κ' is ignored (u'_τ equals $u_\tau \kappa_0 / \kappa'$ in which u_τ is the true friction velocity). Curiously, the "apparent log layer" obtained by fitting a straight line through the inflection point of the profile ($y^+ \approx 40$) follows the velocity profile closely up to a high value of y/δ : about 0.35 as opposed to 0.15 normally. Purtell *et al.* (1981) also remarked on the tendency of the log layer to extend to larger values of y/δ at low Reynolds numbers.

The "strength of the wake" ΔU^+ is defined by Coles (1962) as the maximum value of $(U^+ - U_{log}^+)$, the deviation of the velocity profile over the log law (which occurs in the region near $y/\delta = 0.8$). The quantity is constant, with a value of about 3, at high Reynolds numbers when the defect law is satisfied, but decreases for values of R_θ lower than about 6000 (Coles 1962). This is a prime example of low-Reynolds-number effect. In defining ΔU^+ at low Reynolds number one has to choose between the "apparent" log layer and the normal log layer ($\kappa = 0.41$, $C = 5$). Furthermore the value of ΔU^+ is very sensitive to the constants used for the log layer. If C is changed from 5.0 (Coles 1962) to 5.2 (Murlis *et al.* 1982) ΔU^+ is clearly reduced by 0.2; if κ is changed from 0.40 to 0.41 ΔU^+ is increased by about 0.4 (at $R_\theta = 1410$) which is about 25%. Figure 6 compares the computed values of ΔU^+ , using both definitions, with Coles' curve and other experimental results by Murlis *et al.* (1982) and Erm *et al.* (1985). The curve based on the apparent log law rises like the experimental curves, but the trend in the other curve (based on $\kappa = 0.41$, $C = 5.0$) is very different: it is essentially flat with values of about 1.4, much lower than the accepted value of 3. This trend was already apparent in figure 4a. Very accurate measurements or simulations over a wide Reynolds-number range, as well as a strong consensus on the value of κ , will be needed before definitive results are obtained for ΔU^+ .

A reliable definition of the boundary-layer thickness δ is needed to express the results in the upper part of the flow. The definition of δ as the point where U/U_∞ takes a given value (typically 0.99 or 0.995) is not very satisfactory. It depends on small differences; it is inconsistent with the defect law since u_τ depends on x . The situation is especially confusing at low Reynolds numbers since the velocity profile is not invariant, whether it is normalized by U_∞ or u_τ . On the other hand, the shear-stress profile is very close to invariant when normalized by its wall value as will be shown. Let $\tau(y)$ be the total stress and $\tau(y)^+$ denote $\tau(y)/\tau(0)$; τ^+ varies smoothly from 1 to 0 as y varies from 0 to ∞ . Let the "stress thicknesses" δ_1 and δ_2 be defined by

$$\delta_1 \equiv \int_0^\infty \tau^+(y) dy \quad \text{and} \quad \delta_2 \equiv \int_0^\infty \tau^+(y)(1 - \tau^+(y)) dy. \quad (10)$$

These definitions were made by analogy with the definition of the velocity thicknesses δ^* and θ . One can define a "stress shape factor" $H_\tau \equiv \delta_1/\delta_2$. For reference, the shape factors of a triangular and a rectangular stress distribution are 3 and $+\infty$, respectively. The Gaussian $\exp(-y^2)$ and the cubic $(1 - 3y^2 + 2y^3)$, although both bell-shaped, give quite different values: 3.41 and 3.88. Thus H_τ is a rather sensitive measure of the shape of the stress distribution. The values of H_τ at the four stations of the boundary layer are about

4.0, 3.9, 4.0 and 3.9; they are close to each other, and to the cubic. In contrast the velocity shape factors, H and Clauser's shape factor $G \equiv (U_\infty/u_\tau)(H - 1)/H$ (which was designed to be invariant), are much more sensitive to low-Reynolds-number effects. See figure 4b for the values of H ; G varies from 7.4 to 6.5. This suggests using the stress, instead of the velocity, to define the thickness δ . In order to relate this concept to the familiar concept of δ as the edge of the turbulent region, or of the region with mean shear, the following definition was adopted:

$$\delta \equiv 1.85 \delta_1. \quad (11)$$

The factor 1.85 gives a good match with published values, for instance Klebanoff's (1954). This definition has the advantage of being an integral instead of a local quantity; on the other hand, it applies only to the zero-pressure-gradient boundary layer. Figure 7 shows the shear-stress profiles plotted versus y/δ . The agreement with Klebanoff and the collapse of the total-stress profiles are very good, thus confirming the behavior of H_τ and justifying the definition of δ . At $y = \delta$ the velocity U/U_∞ is equal to 0.9965, 0.9974, and 0.9977 for $R_\theta = 300, 670$ and 1410 respectively. The corresponding values of the defect $(U_\infty - U)/u_\tau$ are 0.065, 0.052, and 0.050. Finally, the values of τ^+ at $y = \delta$ are 0.028, 0.026, and 0.023. Definitions of δ based on any of these three "reasonable" candidates were tried and produced values that differ from (11) by up to 5% and significantly degrade the collapse of the curves in figure 7, especially between 0.5δ and 0.8δ .

In figure 7 the total-stress profiles have zero slope at the wall, as they should since the pressure gradient is zero, and one would naturally expect a parabolic behavior for τ^+ near the wall. However the profiles, at least for $R_\theta = 670$ and 1410, show a flat part around 0.1δ with finite slope, $\partial\tau^+/\partial(y/\delta)$ of about -0.5. A simple argument is outlined in the appendix, which agrees with Townsend's 1956 analysis. It suggests that this behavior is indeed correct, and that at high Reynolds numbers the total-stress profile approaches the wall with a finite slope of the order of -0.6, with the slope falling to zero only within the buffer layer (which becomes very thin compared with δ). This finding is significant, because it means that even the zero-pressure-gradient boundary layer does not contain a constant-stress layer. The stress behaves in a manner similar to a favorable-pressure-gradient flow, and the value -0.6 is of the same order as the value in a channel flow, namely -1 (defining δ as the channel half-width). Again, as in the sink flow, a layer of constant stress and one of logarithmic velocity profile are incompatible (Spalart 1986b).

Figure 8 shows the velocity profiles, now plotted versus y/δ . In figure 8a the velocity U itself is plotted and normalized by U_∞ . Again, experimental results at $R_\theta = 617$ and 1368 are plotted, and the agreement is quite good (for Erm *et al.*'s flow the following values were assumed: $u_\tau/U_\infty = 0.0505$, $\delta^+ = 324$; for Murlis *et al.*: $u_\tau/U_\infty = 0.0442$, $\delta^+ = 547$). In figure 8b the velocity defect $(U - U_\infty)/u_\tau$ is plotted; in addition to Erm *et al.*'s and Murlis *et al.*'s results, the experimental results of Klebanoff (1954) at high Reynolds numbers are shown (assuming $u_\tau/U_\infty = 0.0375$). Again the agreement is acceptable but there is no trend towards Klebanoff's high-Reynolds-number curve, as Coles' theory would predict. The numerical results seem to satisfy a defect law, but one that does not quite agree with Klebanoff's. Note that the results as presented in figure 8 depend on δ , which is not firmly defined. Note also that using the apparent friction velocity u'_τ (deduced from a Clauser plot) instead of the true u_τ to normalize $(U - U_\infty)$ in figure 8b would create a trend towards Klebanoff's curve and thus improve the agreement with Coles' model.

3.3. Streamwise evolution of the turbulence

The behavior of the Reynolds shear stress $-\langle uv \rangle$ is predictable. As shown in figure 7 the normalized total stress τ^+ , plotted versus y/δ , varies very little with the Reynolds number. In the same figure, the Reynolds shear stress $-\langle uv \rangle^+$ shows a weak sensitivity to the Reynolds number for y^+ larger than about 50. This dependence is primarily due to the variation of the (small) viscous stress. Near the wall, of course, the Reynolds stress falls to 0 at a different value of y/δ depending on the sublayer thickness. Figure 9 shows both stresses and the turbulent-energy production $-\langle uv \rangle^+ dU^+/dy^+$ in the wall region. The stresses are rather insensitive to Reynolds number up to a y^+ of about 15, where the low-Reynolds-number profiles bend down. The outer region, in which the stress falls to zero, impinges on the inner region, in which the total stress is essentially constant. The higher-Reynolds-number Reynolds-stress profile agrees very well with Kim, Kline and Reynolds' (1968) experimental curve. The collapse of the production profiles is striking. They agree with each other, with Kim *et al.*'s curve, and with the theoretical profile $1/\kappa y^+$ even in the region where the Reynolds-stress profiles are far from collapsing. At low Reynolds numbers the decrease of $-\langle uv \rangle^+$ and the increase of dU^+/dy^+ (figure 5) cancel each other to a remarkable degree. A simple explanation of this fact has not been found.

The behavior of the normal Reynolds stresses $\langle u^2 \rangle$, $\langle v^2 \rangle$ and $\langle w^2 \rangle$ is more complex than that of the shear stress. The rms values of these fluctuations are plotted in figure 10 vs y/δ , nondimensionalized by u_τ , and compared with Klebanoff's (1954) results. The computed curves agree with Klebanoff's curves reasonably well except in the wall region, below $y^+ = 50$. Outside this region the curves, at least for v and w , show a moderate but consistent rise with Reynolds number. Perry, Lim and Henbest (1985, see also Perry, Henbest and Chong 1986) explain this rise by the lengthening of the inertial range towards higher wave numbers, the low-wave-number part of the spectra being independent of Reynolds number. This hypothesis is supported by figure 11. Power spectra of the three velocity components are shown at $y = \delta/2$, nondimensionalized by u_τ and δ , for the $R_\theta = 300$ and 1410 cases. Spanwise spectra are shown, as they tend to be smoother than the streamwise spectra. Although the sample is marginal for the lowest wave numbers, the indication is that with a larger sample the spectra will coincide well up to a $k_z \delta$ of about 10.

The theory implies that by extending the inertial range to infinite wave numbers one should obtain the "infinite Reynolds number" value for each Reynolds stress at each value of y/δ . Such an extension would add to the stress a correction $C'_1 (u_k/u_\tau)^2$ in which C'_1 is a universal constant, u_k is the Kolmogorov velocity scale $(\nu\epsilon)^{1/4}$, and ϵ is the dissipation rate. A value of 2.8 was assumed for C'_1 , which is smaller than Perry's value. This will be discussed later with the spectra (§3.4). For the computed flows the dissipation rates were available, whereas for Klebanoff's results the dissipation was estimated by scaling the dissipation computed in the $R_\theta = 1410$ simulation. Figure 12 shows that the correction dramatically improves the collapse of the profiles except for $\langle u^2 \rangle$ at $R_\theta = 300$, and near the boundary-layer edge ($y/\delta > 0.8$). In that region the turbulence is intermittent; the irrotational fluctuations, which do not follow Kolmogorov's theory, contribute a significant part of the energy. The agreement with Klebanoff's corrected values is also rather good.

The profiles still do not collapse near the wall, for y^+ less than about 50, which could be expected since no inertial range exists in that region. The obvious similarities between the deviations observed near the wall suggest a model of the type $f_1(y/\delta) + f_2(y^+)$ where f_2 is zero for y^+ larger than about 50; however there is little theoretical support for such a model (one could also try a product, $f_1(y/\delta) \times f_2(y^+)$).

The results in figure 12 confirm the validity of the scaling based on δ and u_τ , and of Perry *et al.*'s viscous correction (although with different constants). The possibility of extrapolating moderate-Reynolds-number simulation results to higher Reynolds numbers using just a simple argument and one universal constant C'_1 is very attractive (however the correction still does not apply in the wall region, and the theory still cannot predict the value of c_f).

When shown in wall variables the profiles also rise with Reynolds number (figure 13). The behavior of w is the most striking: the rise is significant even very near the wall. Experimentally, Coles (1978) and Purtell *et al.* (1981) observed that the rms of u increased with Reynolds number for y^+ larger than 15. Coles also reports a wide scatter in the w values, but without a clear trend versus Reynolds number (1978, and personal communication 1985). The results in figure 13 are in sharp disagreement with the concept of wall scaling (based on u_τ and ν), a concept that was very successful when applied to the mean velocity. By directly extending the arguments from the mean velocity to the stresses one would predict a good collapse of all curves in figure 13, especially near the wall. Note also that a viscous correction by $C'_1(u_k/u_\tau)^2$ could not improve the collapse in figure 13 because, at a given y^+ , u_k/u_τ varies very little with Reynolds number.

Figure 14 shows the rms of the pressure fluctuations, normalized by u_τ^2 . The behavior is very similar to the velocity rms: a slight rise with Reynolds number in the outer region but a strong rise near the wall. The wall value rises from about 1.9 to 2.7, which is well within the experimental scatter. This trend is in agreement with experimental results reviewed by Willmarth (1975), and is consistent with Townsend's (1976) law for the wall value, $\langle p^2 \rangle / u_\tau^4 = C' \log(\delta^+) + D$; the comparison between the cases $R_\theta = 670$ and 1410 suggest $C' \approx 2.05$. The vorticity intensities collapse well when plotted versus y/δ and normalized with the "mixed" scale $\sqrt{u_\tau^3/\delta\nu}$ (which is appropriate for the dissipative scales of motion), but again show a significant rise with Reynolds number when plotted in wall units. This lack of collapse of the velocity, pressure, and vorticity intensities near the wall has important implications for theories and turbulence models. Apparently, one cannot rely on a "law of the wall" for these quantities as for the mean velocity. Note that the multiple-scale approximation that was made is probably most valid near the wall, where the natural length- and time scales are the smallest. The growth terms are also very small near the wall. Thus, it is unlikely that the surprising behavior of the turbulence statistics near the wall could be due to the approximations that were made.

The Reynolds-number effects in figures 13 and 14 can be interpreted in terms of the theory of "active" and "inactive" motions proposed by Townsend (1961) and Bradshaw (1967). This theory was initially developed to explain the observation that some of the triple correlations were Reynolds-number dependent near the wall. The active motion "produces the shear stress and its statistical properties are universal functions of τ and y "; the inactive motion is "effectively irrotational" and does not produce shear stress (Bradshaw 1967). The inactive motion has length and time scales that are large compared

with the viscous-layer scales, and is not directly connected with the wall shear stress. Therefore it may not scale with u_τ and ν (Townsend 1976, p. 138).

Figure 15 shows the length scales responsible for the extra energy at higher Reynolds numbers. The power spectra of the four nonzero components of the Reynolds-stress tensor are shown. The wave number and the energy are nondimensionalized using wall variables (u_τ and ν). Spanwise spectra are presented, in the $y^+ = 15$ plane, for the cases $R_\theta = 300$ and 1410. Figure 15 shows that as the Reynolds number increases, the energy of fluctuations with wavelengths less than about 150 wall units is not affected. In the x direction, only waves longer than about 300 wall units show deviations. Thus, wall scaling is violated only by those scales of motion much larger than the thickness of the wall layer (roughly 50 wall units). These large-scale motions contribute most to $\langle w^2 \rangle$ and little to $\langle v^2 \rangle$ and $-\langle uv \rangle$. This agrees well with the concept of inactive motion.

A simple model of the inactive motion is that the pressure disturbance following a large coherent structure, combined with the no-slip condition, create a situation similar to Stokes' oscillating boundary layer (Schlichting 1979). From the known solution to this equation one can predict the dependence of the extra energy on y^+ . If one takes a typical wave-number $k_x^+ \approx 0.005$, for which the spectra exhibit inactive motion, and a typical convection velocity for a large structure $c^+ \approx 15$ (or $0.75U_\infty$), one obtains a frequency $n^+ \approx 0.075$. In figure 16, the rms profiles corresponding to the Stokes solution at $n^+ = 0.05$ and $n^+ = 0.2$ are compared with the energy differences found in figure 13 between the cases $R_\theta = 670$ and 1410. All of the profiles are normalized to have the same slope at the wall (and therefore the same rms of the wall shear stress). The similarity lends support to a model based on the *laminar* Stokes solution with typical inactive-motion frequencies of the order of $n^+ = 0.1$. Bradshaw (1967) proposed a model based on small quasisteady perturbations to the *turbulent* velocity profile. This model predicts for the inactive motion an rms proportional to $(U_0^+ + y^+ dU_0^+/dy^+)$, where $U_0^+(y^+)$ is the usual law of the wall. This quantity is also plotted in figure 16, with the same normalization, and is seen to be much larger than the other curves except very near the wall. This shows that the hypothesis (implicit in Bradshaw's model) that the velocity profile is in equilibrium with the wall shear stress is not satisfied at the present frequencies, except within a few wall units from the wall. The perturbed-law-of-the-wall model may supersede the laminar model but only at much higher Reynolds number, when sufficiently low frequencies n^+ carry energy, and then only for the u component.

The behavior of the Reynolds stresses will now be compared with the law given by Townsend (1976, p. 154) and Perry *et al.* (1985):

$$\langle u^2 \rangle^+ = B_1 - A_1 \log\left(\frac{y}{\delta}\right), \quad \langle w^2 \rangle^+ = B_2 - A_2 \log\left(\frac{y}{\delta}\right), \quad \langle v^2 \rangle^+ = A_3. \quad (12)$$

This law is thought to apply only in the fully turbulent region and at sufficiently high Reynolds numbers (as already mentioned, Perry *et al.* also proposed a viscous correction to extend this law to lower Reynolds numbers). The law implies that the stresses depend only on y/δ , which was well verified (after viscous correction, see figure 12). At a fixed value of y^+ , a term proportional to $\log(\delta u_\tau/\nu)$ enters the formula for $\langle u^2 \rangle$ and $\langle w^2 \rangle$ (but not $\langle v^2 \rangle$ or $\langle uv \rangle$). The results in figure 13 are quite consistent with this; notice the much smaller rise of $\langle v^2 \rangle$. Equation (12) predicts constant profiles in figure 16, which is consistent since it applies only outside the region affected by the no-slip condition.

Figure 17 shows a final test of (12), comparing the y -dependence of the corrected $R_\theta = 1410$ results with the logarithmic behavior predicted by (12), using $A_1 = 1.1$, $A_2 = 0.66$, $A_3 = 1.75$, $B_1 = 2.$, and $B_2 = 1.1$. The first two values were chosen after inspection of the spectra (§3.4); the last three values were chosen empirically. Perry *et al.* (1985) give slightly different values: $A_3 \approx 1.5$ to 1.9 , $B_1 = 2.48$, $B_2 = 1.12$. The agreement in figure 17 is moderately good. Recall that the wall region, $y^+ < 50$, $y/\delta < 0.075$, should be excluded, and that the slope of the straight lines (A_1 , A_2 , and 0) was *not* adjusted to obtain the best agreement. Because of the insufficient Reynolds number, the present data cannot provide a definitive confirmation of (12), but they are consistent with it as shown in figures 12, 13, and 17.

An unexpected implication of (12) is that at a given value of y^+ , the stresses $\langle u^2 \rangle^+$ and $\langle w^2 \rangle^+$ not only depend on the Reynolds number, but even tend to ∞ like $\log(\delta^+)$ as the Reynolds number tends to ∞ (however, the log-layer overlap condition requires $\log(\delta^+) = U_\infty/u_\tau + B$, where B is a constant, so that $\langle u^2 \rangle / U_\infty^2$ and $\langle w^2 \rangle / U_\infty^2$ still tend to 0). Such a behavior has not been indicated by experiments, but measurements in the wall layer at very high Reynolds numbers are difficult and may not be accurate enough to reveal a slow, logarithmic divergence. Direct simulations at Reynolds numbers higher than the present ones have not been conducted. Presumably, as the Reynolds number increases, the added energy will be independent of y^+ away from the wall and “damped” by a factor similar to the ones in figure 16 near the wall. This damping will extend to higher values of y^+ as the frequency n^+ decreases so that the effect at a y^+ of 10, for instance, will be less than in the log layer. As a result, the shape of the Reynolds-stress profiles near the wall will be progressively altered; for instance the peak value of $\langle u^2 \rangle^+$ will be displaced from its usual location into the log layer. In Klebanoff’s (1954) measurements at $R_\theta \approx 7500$, the peak value of the rms of u is about $2.98 u_\tau$ and occurs at $y^+ \approx 22$. These values are significantly higher than the accepted values, which are about 2.7 and 13. Finally, note that the diagonal elements of the Reynolds-stress tensor can tend to ∞ , compared with the off-diagonal elements, without violating the condition of realizability. The correlation coefficients simply tend to 0.

Another implication of the theory is that in (12) the constants B_1 and B_2 are not universal, so that the Reynolds stresses at a fixed y^+ depend not only on δ^+ , but also on the type of flow: e.g., boundary layer, pipe, and channel (the definition of δ is not universal either). Thus (12) conflicts in many ways with the concept of a law of the wall for the Reynolds stresses. Bradshaw (1967) used his quasi-steady perturbation model to show that the mean-velocity profile has very little sensitivity to the inactive motion, which could explain why it does not deviate from the law of the wall.

The size of the flow structures at different Reynolds numbers was examined in relation with the failure of the law of the wall for the statistical quantities. Figures 18 and 19 show contours of constant vorticity magnitude at $R_\theta = 300$ and 1410, normalized by $\sqrt{u_\tau^3/\delta\nu}$ (recall that this normalization yielded a collapse of the vorticity rms). Cross-sections of the flow by a streamwise plane, a vertical spanwise plane and oblique planes at $\pm 45^\circ$ are taken in the manner of Falco (1977) and Head and Bandyopadhyay (1981). Similar figures were obtained from numerical simulations in channels (e.g., Deardorff 1970, Schumann 1975, Moin and Kim 1982.). Note the depth of the irrotational “valleys” and the sharpness of the irrotational-rotational interface (compared with the boundary-layer thickness), especially

at the higher Reynolds number. This suggests that the entrainment process is at least qualitatively reproduced within the multiple-scale approximation (essentially because V is negative: $V \approx -0.025U_\infty$ at $y = \delta$). Note also the absence of numerical oscillations in the irrotational region, as could be caused by inadequate resolution. The figures show that the “typical eddies” are smaller (relative to the boundary-layer thickness) at higher Reynolds number, as shown by the experiments. The similarity between the present results at $R_\theta = 1410$ and Head and Bandyopadhyay’s photographs at $R_\theta = 1700$ is good. It is however difficult to ascertain that the eddy scales in figures 18 and 19 are exactly the same, in wall units, as Head and Bandyopadhyay’s model implies.

3.4. Analysis of the spectra

The $R_\theta = 1410$ case is used for a more detailed study in order to minimize the low-Reynolds-number effects. In a wall-bounded flow, wave numbers can be nondimensionalized in at least four ways; one can use the Kolmogorov length scale $l_k \equiv (\nu^3/\epsilon)^{1/4}$, the wall length scale ν/u_τ , the distance from the wall y , or the thickness of the boundary layer, δ (Perry *et al.* 1985). The presentation of the results will make use of the different normalizations and owes much to Perry *et al.*’s work (1985, 1986). Their theory is based on certain assumptions about the shape of the eddies, and on dimensional analysis. Bradshaw (1967) also presented a theory based on dimensional analysis. Perry *et al.* tentatively define the “fully turbulent region” by $y^+ > 100$, $y/\delta < 0.15$. Partly because of the moderate value of the Reynolds number, a less conservative definition was adopted here: $y^+ > 50$, $y/\delta < 0.3$. The study of the spectra indicate that this definition is not unreasonable.

Figure 20 shows spectra with Kolmogorov scaling. The maximum nondimensional wave numbers kl_k are about 0.3 and 0.8 in the x and z directions, respectively. The values of y^+ are 100 and 200 (recall that $\delta^+ \approx 660$). The spectra from the two planes collapse quite well for kl_k larger than about 0.05. Deviations appear at the highest wave numbers, probably because of numerical truncation; there is even a slight turnup of the z -spectra. In the x direction, the spectrum of $\langle u^2 \rangle$ has a significant inertial range, about half a decade. For the other components, the inertial ranges are short or insignificant. The Kolmogorov constant was computed as the maximum of $E(k)k^{5/3}$. As for the log layer, this definition has the advantage of being rigorous, but one should expect the Kolmogorov constants to be slightly overestimated especially if the spectra are noisy. The value for $\langle u^2 \rangle$ is 0.55 ± 0.05 , which is in good agreement with the accepted value of about 0.5 (Townsend 1976). The transverse Kolmogorov constants are 0.62 and 0.7, with similar uncertainties, for $\langle v^2 \rangle$ and $\langle w^2 \rangle$, respectively. Recall that in isotropic turbulence, the transverse Kolmogorov constants are larger than the longitudinal one by a factor of $4/3$.

The behavior of the z -spectra (figure 20b) is similar to the x -spectra for kl_k larger than 0.1, but for lower wave numbers no inertial range is found. The spectra do not remain tangent to the $k^{-5/3}$ law; instead they peel off for $k_z l_k$ lower than about 0.05. Furthermore the Kolmogorov constants, defined as before, deviate from the accepted values more than in the x direction: they are about 1.4, 0.7, and 0.6 for $\langle u^2 \rangle$, $\langle v^2 \rangle$, and $\langle w^2 \rangle$, respectively. It seems that a much higher Reynolds number is needed for the inertial-range behavior to be set in the z direction.

Figure 21 shows a test of the isotropy of the small scales. The one-dimensional spectra of an isotropic field satisfy $E_2 = E_3 = (E_1 - k_1 dE_1/dk_1)/2$ where k_1 is the wave number, E_1 the spectral density in that direction, and E_2 and E_3 the densities in the transverse directions (Townsend 1976). These three quantities are compared in figure 21, in the z direction; the x -direction spectra show the same trend but are noisier. In figure 21a, with $y^+ = 200$, the small scales are seen to satisfy the isotropy conditions rather well for $k_1 l_k$ larger than about 0.1. In contrast, in figure 21b, with $y^+ = 40$, the spectra do not show isotropy. A similar test was conducted by Klebanoff (1954). The lack of isotropy of even the small scales near the wall is explained by the fact that the macroscales of the turbulence, namely y and ν/u_τ , are not much larger than the Kolmogorov scale l_k . The size of the buffer-layer vortices, which are obviously nonisotropic, nonuniversal structures, is about $15\nu/u_\tau$ whereas l_k is approximately equal to ν/u_τ . This implies that the fundamental assumption of the large-eddy-simulation method, the existence of universal, isotropic small eddies, is not valid in the wall region.

In theory, the spectra allow computation of the value of the constant C'_1 (§3.3). As presented by Perry *et al.* (1985, 1986) the correction is $C_1/\sqrt{y^+}$, $(4/3)C_1/\sqrt{y^+}$, and $(4/3)C_1/\sqrt{y^+}$ for $\langle u^2 \rangle^+$, $\langle v^2 \rangle^+$, and $\langle w^2 \rangle^+$, respectively. It seems disturbing that this correction is not isotropic. To obtain the 4/3 factor, one needs to restrict one's attention to streamwise spectra, and to make the nontrivial assumption that the transverse spectral densities equal 4/3 times the longitudinal spectral density *even* in the viscous peel-off range. This assumption is not compatible with the equation $E_2 = E_3 = (E_1 - k_1 dE_1/dk_1)/2$ and the fact that in that range, $dE_1/dk_1 < (-5/3)E_1/k_1$. In fact, using the isotropy equation, one can easily show that the integral is the same for the three velocity components. For the present study (including figure 12) it was decided to discard the 4/3 factors.

The values of the constants C_1 and C'_1 are not easy to establish. They are related by $C_1 = C'_1/\sqrt{\kappa}$ since in the constant-stress layer $\epsilon^+ = 1/(\kappa y^+)$. Perry *et al.* quote $C_1 = 6.08$, which implies $C'_1 = 3.89$. They obtained this value by setting the spectrum to 0 beyond a peeloff wave number $kl_k = M$, which could yield a rather crude over-estimate of the energy difference; M is also ill-defined. From the spectra in figure 20b, one obtains the estimate $C'_1 \approx 2$. However the spectra are thought to be somewhat inaccurate (too high) near the numerical cutoff, and the value of the Kolmogorov constant is not firmly established, so that this estimate is not very reliable either. To obtain a reliable estimate one would probably need a simulation that exceeds the Kolmogorov wave number in all directions, and shows a convincing inertial range. Studies by Grant and Pao (see Hinze 1975) suggest values of about 5 and 3.4, respectively. The value $C'_1 = 2.8 \pm 0.2$ was obtained empirically by optimizing the collapse of the profiles in figure 12.

In figure 22, δ is used as a length scale. Perry *et al.* (1985) predict that for low wave numbers ($k_x \delta$ less than about 3), the spectra from different horizontal planes will collapse for u and w , but not v . Although the spectra are noisy especially at low wave numbers, figure 22 shows encouraging agreement with the theory. The collapse is good for u in both directions and rather good for w . The v -spectra are higher for higher values of y , especially in the z direction. The agreement with the experimental spectra of Bradshaw (1967) and Perry *et al.* (1985) is good for $k_x \delta$ larger than about 1. However for

lower wave numbers, the computed spectra do not level off like the experimental spectra. This is especially apparent for the spectra of u . Each set of data has its own sources of error. The experimenters converted frequency spectra into spatial spectra using Taylor's hypothesis, which is least valid for low wave-numbers (see Perry *et al.*'s discussion of the errors involved). The simulations directly yield spatial spectra, so these errors are avoided. On the other hand, the multiple-scale approximation may be showing its limitations here. In a true spatially-developing flow, the incoming flow has a smaller thickness and therefore the long waves are less energetic. Since this effect is suppressed by the approximations that were made one would expect the energy of the long waves to be slightly over-predicted, which is what the comparison between figure 22 and the experimental results suggests (the crude treatment of the straining effects, discussed in §2.2, could also play a role).

Finally figure 23 shows the spectra normalized with y as the length scale. This scaling provides the richest behavior in Perry *et al.*'s (1985) theory: a collapse of spectra from different values of y , with a pivot point at $k_x y$ of the order of 1, a k_x^{-1} range on the left (except for v which is expected to be constant), and the $k_x^{-5/3}$ range on the right. Experimental results generally confirm this picture (Klebanoff 1954, Perry *et al.* 1985). In figure 23, segments with slope -1 and $-5/3$ are tentatively drawn on all the plots. In the x direction, the results show a good collapse on the right of the pivot, with the curves corresponding to lower values of y peeling off first. The degree of agreement with a $k^{-5/3}$ law was discussed earlier. In the z direction the collapse, like the $k^{-5/3}$ behavior, may be prevented by the insufficient range of scales. However, there is no reason why the theory should not apply to spanwise spectra.

On the left of the pivot, the collapse and the agreement with the k^{-1} model are convincing only for $\langle u^2 \rangle$ and $\langle -uv \rangle$, in the x direction. A conclusive check of the theory is made difficult by the statistical noise, the finite values of the periods Λ_x and Λ_z , and the limited range of scales due to the moderate value of the Reynolds number. From figure 23 one can estimate the constants multiplying k_x^{-1} for the various components. For $\langle -uv \rangle$, it is 0.18, which is in excellent agreement with Klebanoff's (1954) measurements. Using Perry *et al.*'s notation, the computed values (which are probably slightly overestimated) are: for u , $A_1 = 1.1$; for w , $A_2 = 0.66$. These constants entered (12) (in fact (12) is a direct consequence of the existence of a k^{-1} range). Perry *et al.* (1985, note that their values are switched in their Table 1) quote $A_1 = 1.03$, $A_2 = 0.73$. In a pipe flow Perry *et al.* (1986) measured $A_1 = 0.90$; Klebanoff (1954) obtains $A_1 \approx 0.85$. These constants are thought to be universal. The agreement between measured and computed values is acceptable.

3.5. Reynolds-stress budget equations

The various terms in the budget of the four nonzero Reynolds stresses are shown in figure 24, near the wall, and in figure 25 away from the wall. The contribution of the growth (or advection) terms is negligible near the wall (recall that V is zero in that region) and becomes noticeable only for y/δ larger than about 0.5. Conversely, the viscous diffusion is negligible for $y^+ > 25$. The terms sum up to 0 very well near the wall; in the outer region the residuals are less than 0.5 in the units of figure 25. As expected the near-wall behavior is very similar to that observed in a channel flow (Moser and Moin 1984). As the Reynolds

number increases, there is a weak trend for most of the quantities in figure 24 to increase. Furthermore there is a very noticeable enhancement (up to 20% increase from $R_\theta = 300$ to 1410) of the dissipation and of the viscous diffusion for y^+ smaller than about 10 (as part of the inactive-motion theory Bradshaw (1967) predicted that the dissipation and the *turbulent* diffusion would be enhanced). Since the inactive motion has long time scales, one expects it to contribute relatively less to the energy budget than to the energy itself. The enhancement of the viscous diffusion is of course linked to the increase of the Reynolds stresses, seen in figure 13. The profiles in figure 24 should be considered as representative, but not as universal.

In figure 25 the terms are normalized by u_τ^3/δ . Again, one should not take the results as universal. At higher Reynolds numbers the dissipation tensor slowly becomes more isotropic. This evolution of the dissipation terms is compensated for by the pressure terms and the turbulent-diffusion terms, in roughly equal parts. Note that numerical truncation, by suppressing small-scale structures, tends to artificially increase the anisotropy of the dissipation tensor; the refined simulation that was done at $R_\delta = 500$ showed slightly less dissipation-tensor anisotropy than the basic simulation. However the differences between the two sets of results were of the order of only 0.03 for the nondimensional anisotropy (which is defined as the ratio of the various terms to the trace of the tensor, and takes values of the order of 1/3). For the shear stress, the production and pressure terms both increase significantly with Reynolds number. Thus unless it explicitly includes low-Reynolds-number effects, a turbulence model should not be expected to match the present results very closely. For the total energy, the production and the dissipation are in balance over most of the boundary layer; but for separate components, the pressure term is often significant. For y/δ between about 0.5 and 1.2, the turbulent-diffusion and growth terms become important. In this flow the contribution of the growth terms to the Reynolds-stress budget is consistently negative.

4. Conclusions

Direct numerical simulations of the boundary layer on a flat plate were performed at four Reynolds numbers, including a value significantly larger than in any previous direct simulations. A systematic multiple-scale procedure was used to approximate the local effects of the streamwise growth of the flow. This approximation seems to be successful. The numerical truncation errors were estimated and shown to be much smaller than the relevant variations of the results. In general the agreement with experimental results was good. The most significant discrepancy is in the value of the computed friction coefficient at the highest Reynolds number, which is too large by about 5%.

The mean-velocity and shear-stress profiles behaved as predicted by Coles' analysis, except for the strength of the wake. At very low Reynolds numbers, R_θ less than about 600, the logarithmic layer disappears, and the Clauser-plot method yields incorrectly high values of the friction velocity. A definition of the boundary-layer thickness δ as an integral of the total shear stress was introduced, and produced a very good collapse of the stress profiles from different Reynolds numbers. The total stress appears to approach the wall

with a finite slope, in contrast with the parabolic behavior that is usually assumed. The other Reynolds stresses also collapsed very well, away from the wall, after a variant of Perry's viscous correction was applied. When the boundary-layer thickness δ is used as a length scale, the energy of the *small-scale* motion increases with Reynolds number.

Near the wall the Reynolds stresses $\langle u^2 \rangle$ and $\langle w^2 \rangle$, unlike the mean velocity and the shear stress, did not collapse when normalized with ν and u_τ and showed a strong trend to increase, consistent with Townsend and Perry's theories. This model even predicts that the stresses at fixed y^+ tend to infinity like the logarithm of the outer-flow Reynolds number, and depend on the type of outer flow. When the wall length scale ν/u_τ is used, the *large-scale* motion is responsible for the increased energy. The waves fit the description of "inactive motion" given by Townsend and Bradshaw. A simple model, based on an oscillating near-wall layer, predicted the proper trend for the stress variation with Reynolds number, but a convincing quantitative extension of the model into the wall region remains to be found. The spectra showed encouraging agreement with various theories, including Kolmogorov's and Perry's, and yielded satisfactory values for some of the universal constants. Extensive data were provided for the development of turbulence models both near the wall and in the outer region, and the Reynolds-number dependence of the major terms was discussed. The anisotropy of the dissipation tensor was found to be significant even at the highest Reynolds number reached.

The author had useful discussions with Drs. J. Kim, N. Mansour, P. Moin, R. Rogallo and A. Wray (NASA Ames Research Center), and with Prof. P. Bradshaw (Imperial College, London). Dr. Mansour reviewed the manuscript.

APPENDIX

We examine the classical two-layer model of the flat-plate turbulent boundary layer (Townsend 1956, p. 229), especially the local momentum equation. The assumptions are, near the wall:

$$U^+ = f(y^+), \quad (\text{A1a})$$

$$\tau^+ = 1, \quad (\text{A1b})$$

and away from the wall:

$$(U - U_\infty)^+ = g(y/\delta), \quad (\text{A2a})$$

$$\tau^+ = h(y/\delta), \quad (\text{A2b})$$

for some nondimensional functions f , g and h . The boundary-layer momentum and continuity equations are

$$UU_x + VU_y = \frac{\partial \tau}{\partial y}, \quad U_x + V_y = 0. \quad (\text{A3})$$

In the wall region, which includes the log layer, the momentum equation becomes (after using some algebra and continuity):

$$h' = \frac{\delta u_{\tau x}}{u_\tau} f^2. \quad (\text{A4})$$

Strictly speaking this contradicts (A2b), because the right-hand-side of (A4) is not just a function of y/δ . Is it compatible with a parabolic behavior of g , in particular as the Reynolds number tends to ∞ ? When this happens $\delta u_{\tau x}/u_\tau$ tends to 0 and f^2 tends to ∞ (at fixed y/δ); we therefore need better estimates. We shall use the overlap condition and the total-momentum equation.

Equations (A1a) and (A2a) overlap in the log layer. By differentiating the overlap condition with respect to x , we obtain (Coles 1956)

$$\frac{\delta_x}{\delta} + \frac{u_{\tau x}}{u_\tau} \left(1 + \kappa \frac{U_\infty}{u_\tau}\right) = 0. \quad (\text{A5})$$

The momentum equation is $d\theta/dx = u_\tau^2/U_\infty^2$. Using (A1a) and (A2a) we obtain

$$\theta = D_1 \frac{u_\tau}{U_\infty} \delta + D_2 \frac{u_\tau^2}{U_\infty^2} \delta + D_3 \frac{\nu}{U_\infty} + D_4 \frac{\nu u_\tau}{U_\infty^2} \quad (\text{A6})$$

for some constants $D_1 \approx 3.9$, $D_2 \approx -24$, $D_3 \approx 52$, and D_4 . Clauser (1954) gives the value 3.6 for D_1 (Δ in his notation).

We compute $d\theta/dx$, neglecting the last term in (A6) which is very small, and using (A5) to eliminate δ_x :

$$\frac{\delta u_{\tau x}}{u_\tau} \left[-\kappa D_1 + (1 - \kappa) \frac{D_2 u_\tau}{U_\infty} \right] = \frac{u_\tau^2}{U_\infty^2} \quad (\text{A7})$$

so that (A4) becomes

$$h' = -\frac{1}{(\kappa D_1 - (1 - \kappa) \frac{D_2 u_\tau}{U_\infty})} \left(\frac{U^2}{U_\infty^2} \right). \quad (\text{A8})$$

We consider a fixed value of y/δ (but within the log layer) and let the Reynolds number tend to ∞ . The ratio u_τ/U_∞ tends to 0 and U/U_∞ tends to 1. Therefore the leading term is $-1/(\kappa D_1)$ (≈ -0.6) and is a constant. This means that up to the edge of the log layer $\tau^+(y)$ has a flat part with finite slope $-0.6/\delta$. Townsend (p. 255, 1956 edition) obtains the same behavior, with slope about -0.5. Curiously, he removed this result for the 1976 edition. At moderate Reynolds numbers, both factors in (A8) get smaller. Klebanoff's 1954 results and the present results show about -0.5 for h' up to $y/\delta \approx 0.2$.

REFERENCES

- Bradshaw, P. 1967** 'Inactive' motion and pressure fluctuations in turbulent boundary layers. *J. Fluid Mech.* **30**, **2**, 241-258.
- Clauser, F. 1954** Turbulent boundary layers in adverse pressure gradients. *J. Aero Sci.* **21**, **2**, 91-108.
- Coles, D. E. 1956** The law of the wake in the turbulent boundary layer. *J. Fluid Mech.* **1**, **2**, 191-226.
- Coles, D. E. 1962** The turbulent boundary layer in a compressible fluid. *Rand. Rep.* R403-PR, ARC 24473: Appendix A: A manual of experimental practice for low speed flow.
- Coles, D. E. 1978** A model for flow in the viscous sublayer. *Workshop on Coherent structures of Turbulent Boundary Layers*, AFOSR/Lehigh University, Bethlehem, PA, pp. 462-475.
- Deardorff, J. W. 1970** A numerical study of three-dimensional turbulent channel flow at large Reynolds numbers. *J. Fluid Mech.* **41**, 453-480.
- Erm, L. P., Smits, A. J. and Joubert, P. N. 1985** Low Reynolds number turbulent boundary layers on a smooth flat surface in a zero pressure gradient. Proceedings of the 5th Symposium on Turbulent Shear Flows, Ithaca, NY, August 7-9, 1985.
- Falco, R. E. 1977** Coherent motions in the outer region of turbulent boundary layers. *Phys. Fluids Suppl.* **20**, 124-132.
- Hanjalic, K. and Launder, B. E. 1976** Contribution towards a Reynolds-stress closure for low-Reynolds-number turbulence. *J. Fluid Mech.* **74**, **4**, 593-610.
- Head, M. B. and Bandyopadhyay, P. 1981** New aspects of turbulent boundary layer structures. *J. Fluid Mech.* **107**, 297-338.
- Hinze, J. O. 1975** Turbulence. 2nd ed. McGraw-Hill, New York.
- Kim, H. T., Kline, S. J. and Reynolds, W. C. 1968** An experimental study of turbulence production near a smooth wall in a turbulent boundary layer with zero pressure gradient. Report MD-20, Stanford University, CA.
- Klebanoff, P. S. 1954** Characteristics of turbulence in a boundary layer with zero pressure gradient. NACA TN-3178.
- Moin, P. and Kim, J. 1982** Numerical investigation of turbulent channel flow. *J. Fluid Mech.* **118**, 341-377.
- Moser, R. D. and Moin, P. 1984** Direct numerical simulation of curved turbulent channel flow. NASA TM-85974.
- Murlis, J., Tsai, H. M. and Bradshaw, P. 1982** The structure of turbulent boundary layers at low Reynolds numbers. *J. Fluid Mech.* **122**, 13-56.
- Perry, A. E., Lim, K. L. and Henbest, S. M. 1985** A spectral analysis of smooth flat-plate boundary layers. Proceedings of the 5th Symposium on Turbulent Shear Flows, Ithaca, NY, August 7-9, 1985.
- Perry, A. E., Henbest, S. and Chong, M. S. 1986** A theoretical and experimental study of wall turbulence. *J. Fluid Mech.* **165**, 163-199.
- Preston, J. H. 1957** The minimum Reynolds number for a turbulent boundary layer and the selection of a transition device. *J. Fluid Mech.* **3**, 373-384.

- Purtell, L. P., Klebanoff, P. S. and Buckley, F. T. 1981** Turbulent boundary layers at low Reynolds numbers. *Phys. Fluids* **24**, 802-811.
- Rogallo, R. S. 1981** Numerical experiments in homogeneous turbulence. NASA TM-81315.
- Rogallo, R. S., and Moin, P. 1984** Numerical simulation of turbulent flows. *Ann. Rev. Fluid Mech.* **16**, 99-138.
- Schlichting, H. 1979** Boundary layer theory. 7th ed. McGraw-Hill, New York.
- Schumann, U. 1975** Subgrid scale models for finite difference simulations of turbulent flows in plane channels and annuli. *J. Comp. Phys.* **18**, 376-404.
- Spalart, P. R. 1986a** Numerical simulation of boundary layers: Part 1. Weak formulation and numerical method. NASA TM-88222.
- Spalart, P. R. 1986b** Numerical study of sink-flow boundary layers. *J. Fluid Mech.* **172**, 307-328.
- Spalart, P. R. and Leonard, A. 1985** Direct numerical simulation of equilibrium turbulent boundary layers. Proceedings of the 5th Symposium on Turbulent Shear Flows, Ithaca, NY, August 7-9, 1985.
- Townsend, A. A. 1961** Equilibrium layers and wall turbulence. *J. Fluid Mech.* **11**, 97-120.
- Townsend, A. A. 1956** *The structure of turbulent shear flow*, 1st ed. Cambridge University Press.
- Townsend, A. A. 1976** *The structure of turbulent shear flow*, 2nd ed. Cambridge University Press.
- Willmarth, W. W. 1975** Pressure fluctuations beneath turbulent boundary layers. *Ann. Rev. Fluid Mech.* **7**, 13-38.

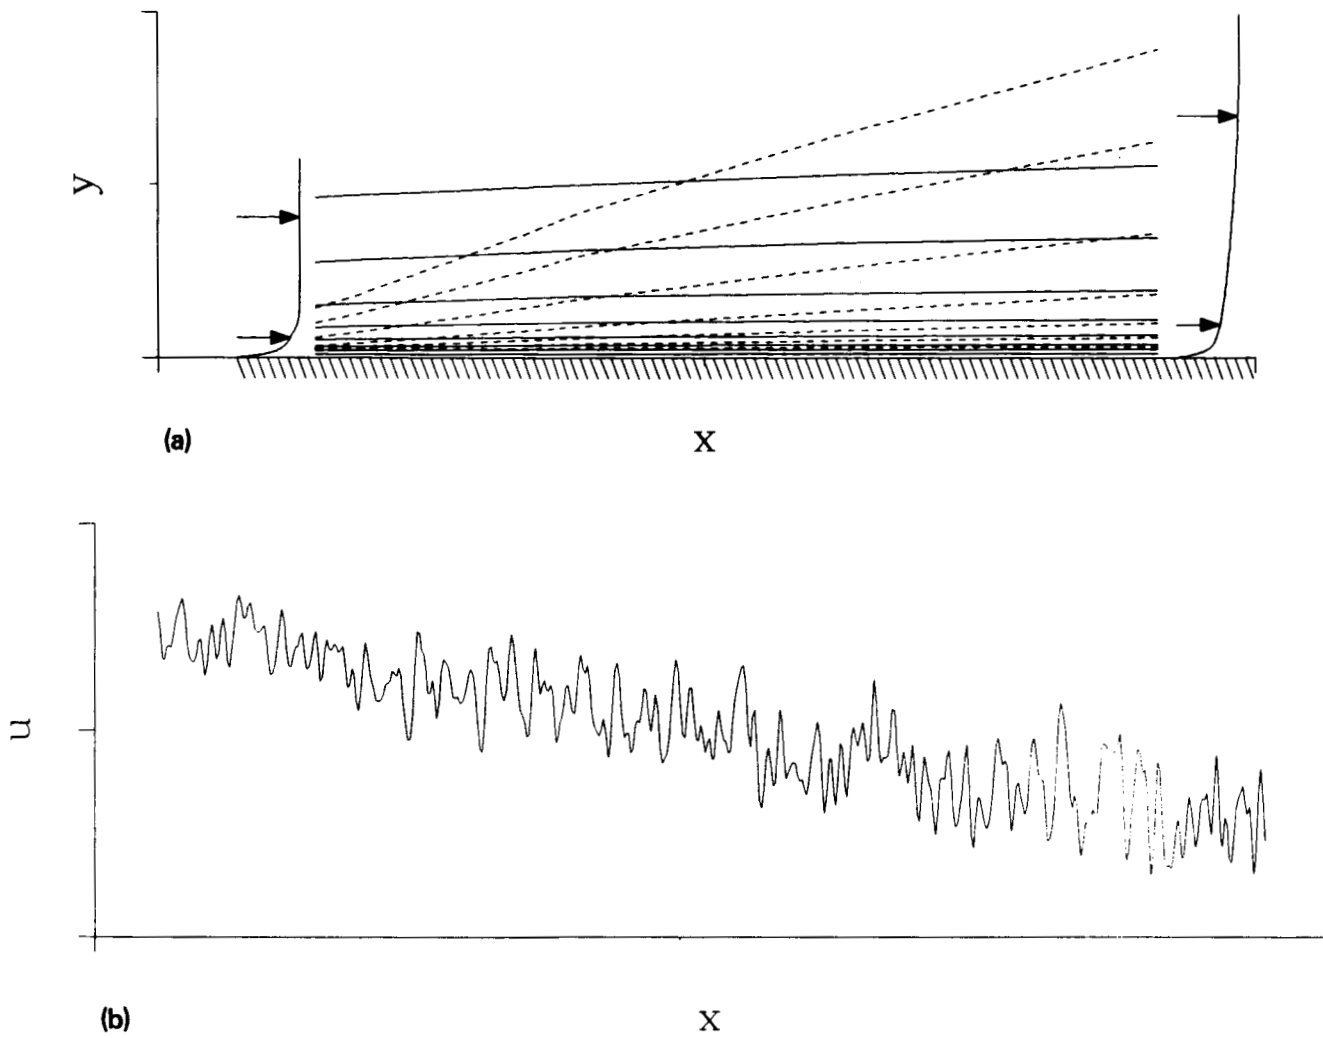


Figure 1. Sketch of a spatially-developing boundary layer. a) geometry. \rightarrow velocity vectors; — streamlines; - - - coordinate lines. b) turbulent signal.

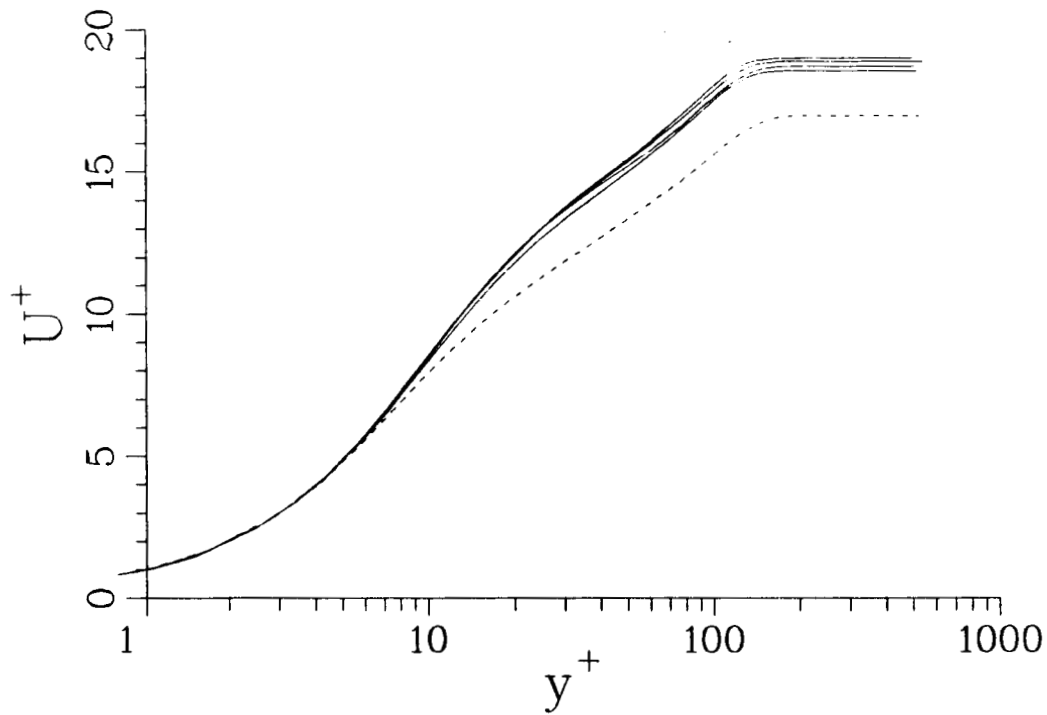


Figure 2. Resolution check at $R_{\delta^*} = 500$. - - - coarse resolution; — all other cases.

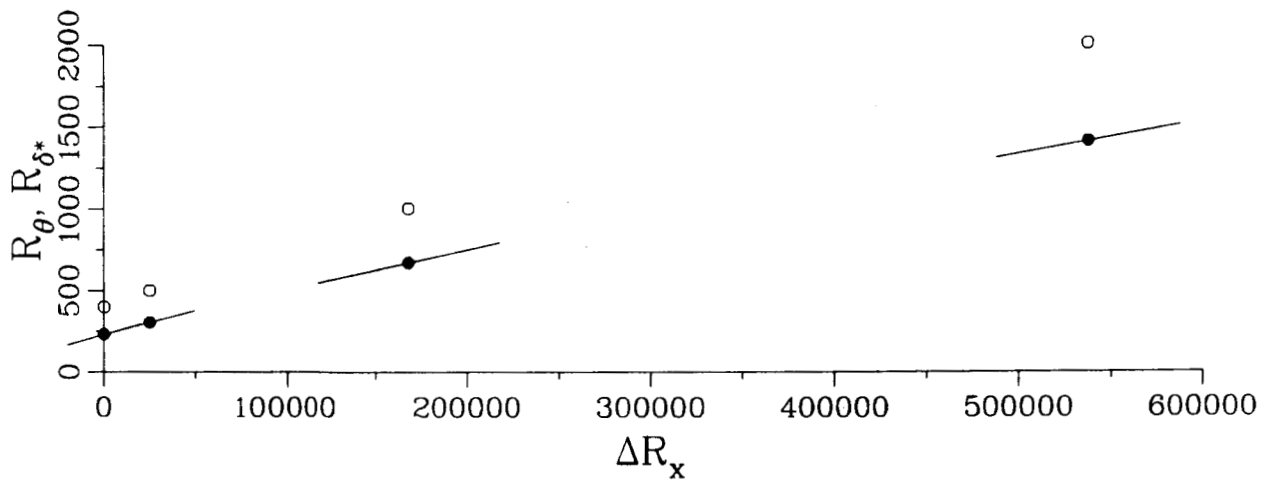


Figure 3. Streamwise thickening of the boundary layer. o displacement thickness δ^* ; • momentum thickness θ ; -•- slope $c_f/2$.

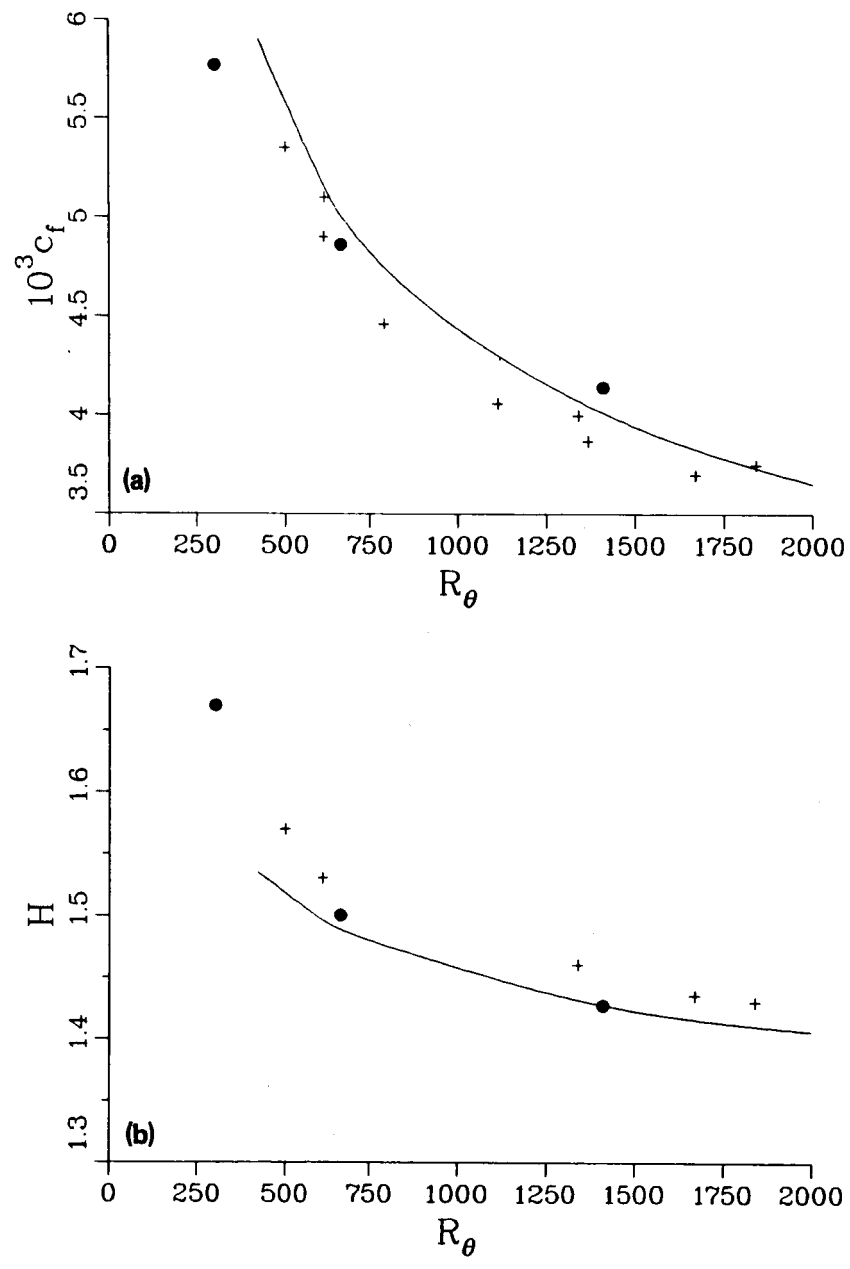


Figure 4. Streamwise evolution of the boundary layer. • present results; — Coles; + other experiments. a) friction coefficient c_f ; b) shape factor H .

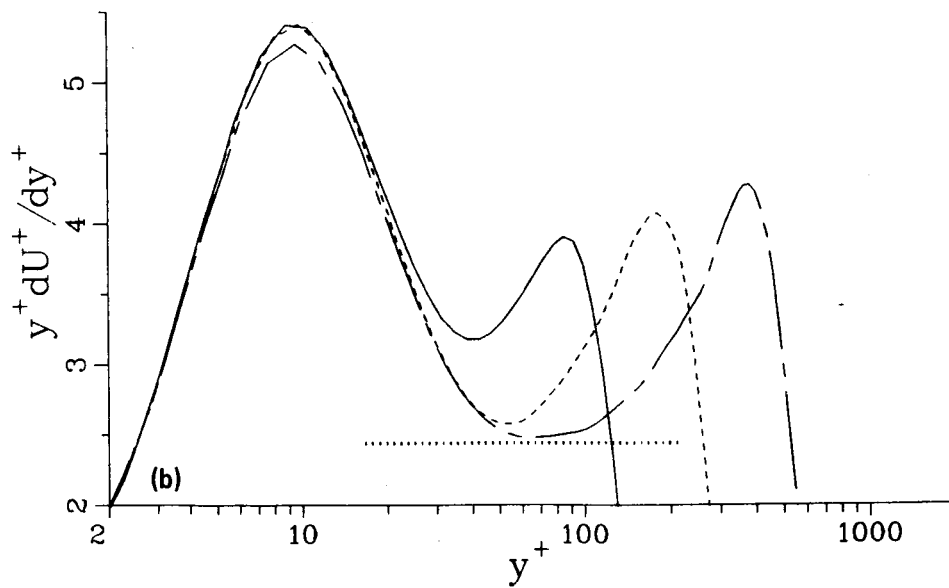
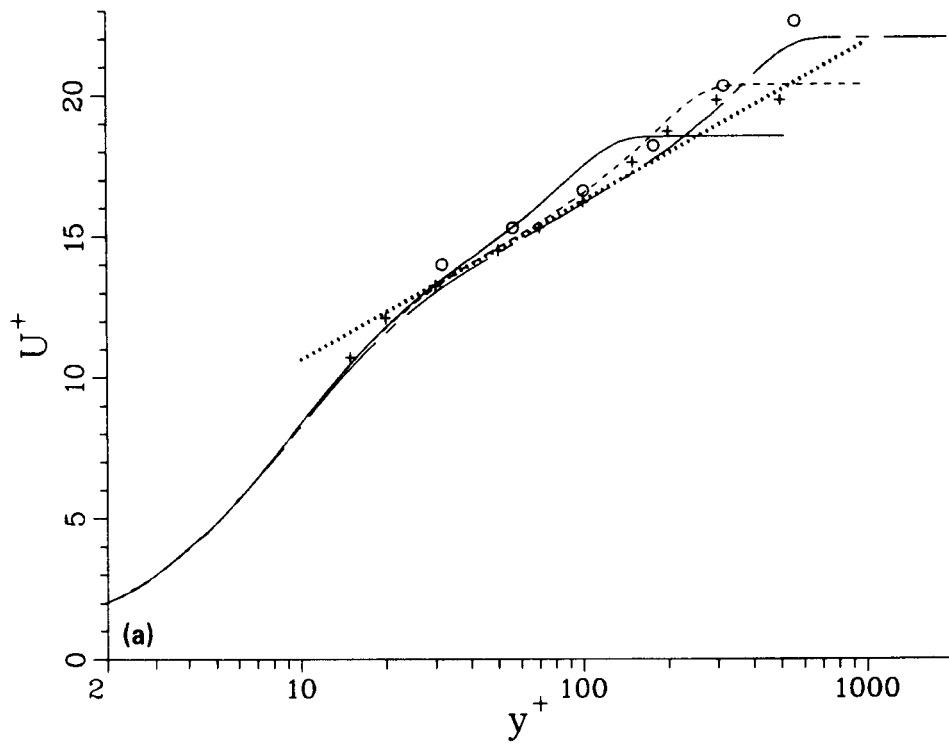


Figure 5. Mean-velocity profile and its derivative. — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$; ... log law $U^+ = \log(y^+)/0.41 + 5$; + $R_\theta = 617$ (Erm *et al.* 1985); o $R_\theta = 1368$ (Murlis *et al.* 1982). a) U^+ ; b) $y^+ dU^+/dy^+$.

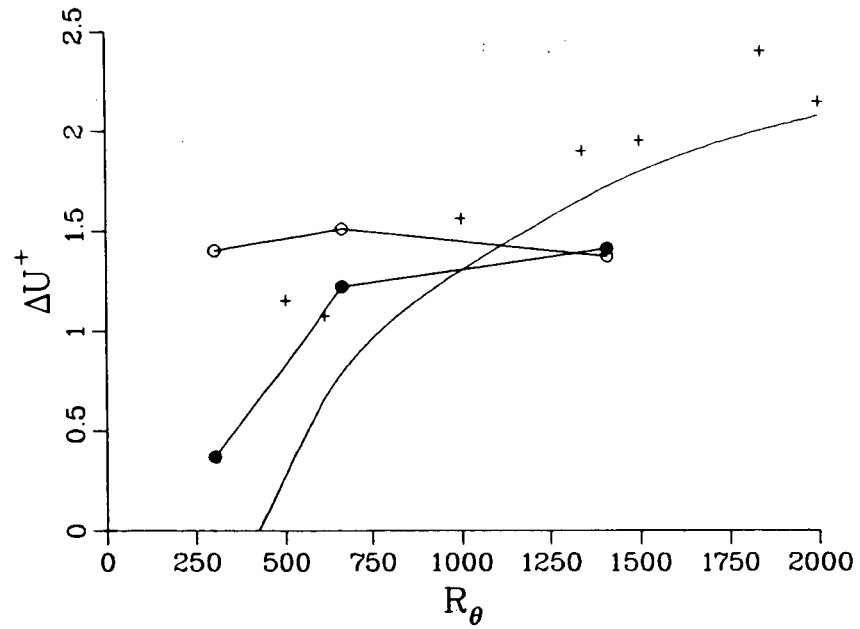


Figure 6. Strength of the wake, ΔU^+ . Present results: \bullet based on apparent log law; \circ based on normal log law. — Coles; + other experiments.

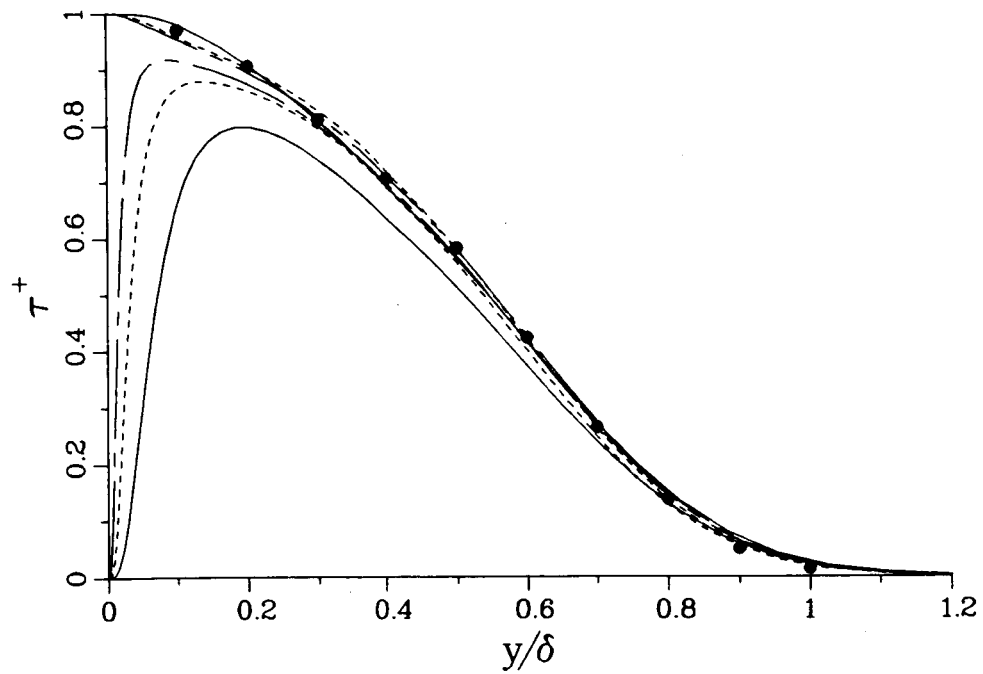


Figure 7. Shear-stress distribution. — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$. Upper curve, total stress; lower curve, Reynolds stress. \bullet $R_\theta \approx 7500$ (Klebanoff 1954).

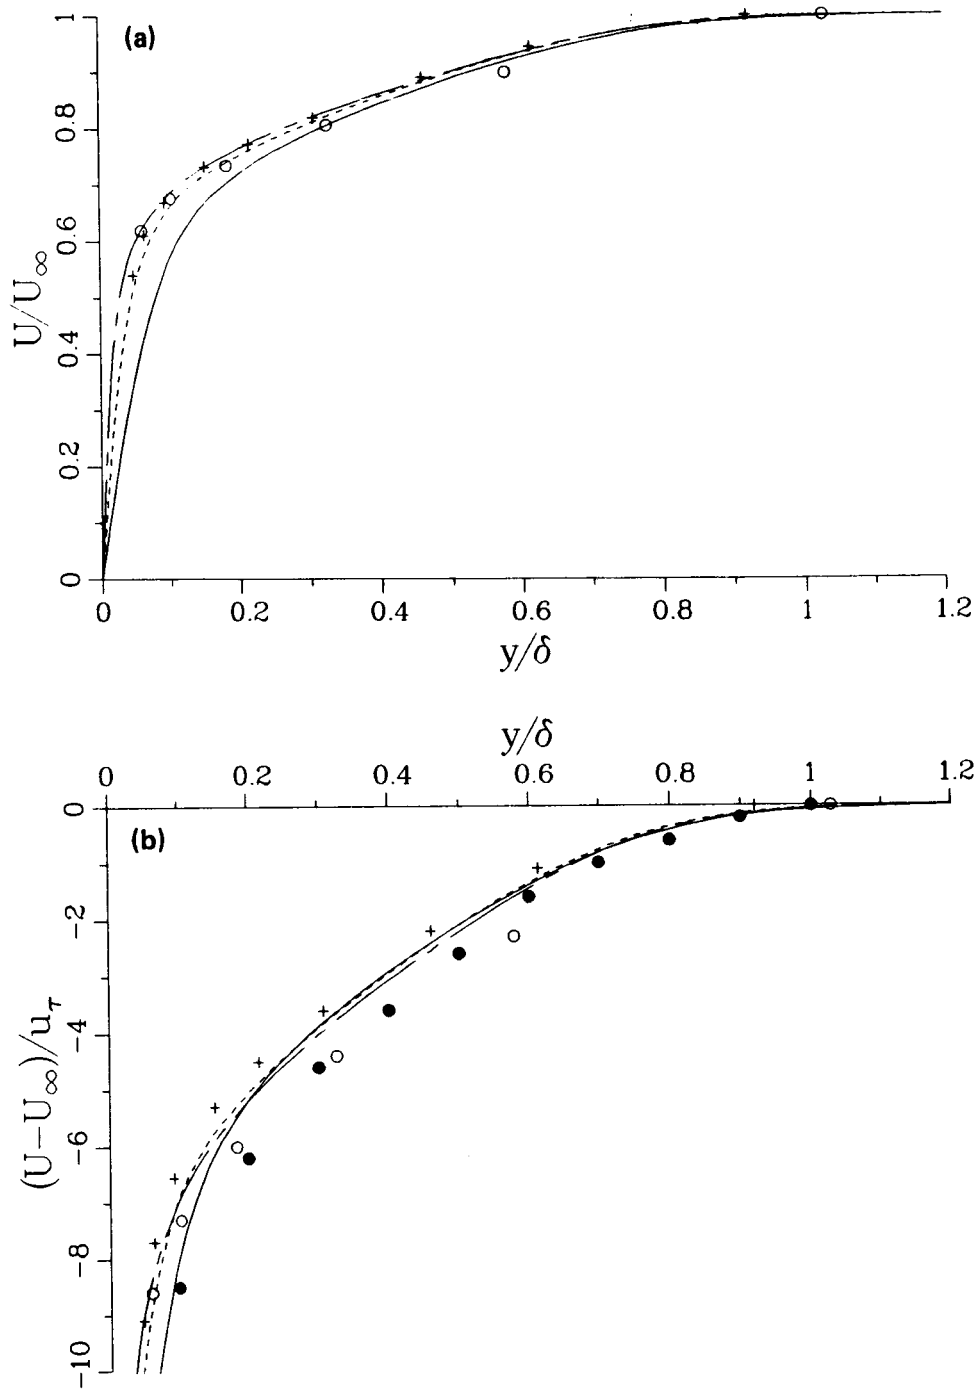


Figure 8. Mean-velocity profile. — $R_\theta = 300$; - - - $R_\theta = 670$; - · - · $R_\theta = 1410$.
 + $R_\theta = 617$ (Erm *et al.* 1985); o $R_\theta = 1368$ (Murlis *et al.* 1982); • $R_\theta \approx 7500$ (Klebanoff
 1954). a) U/U_∞ ; b) $(U - U_\infty)/u_\tau$.

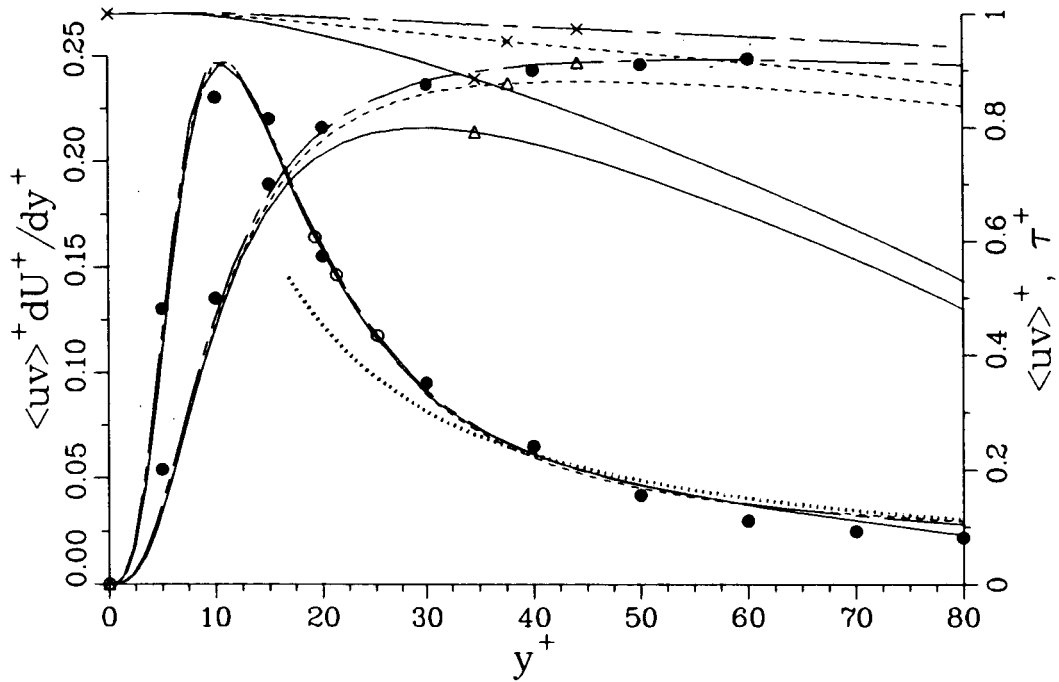


Figure 9. Stresses and production near the wall. — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$ $1/\kappa y^+$. Δ Reynolds stress; \times total stress; \circ production. \bullet Kim *et al.* 1968.

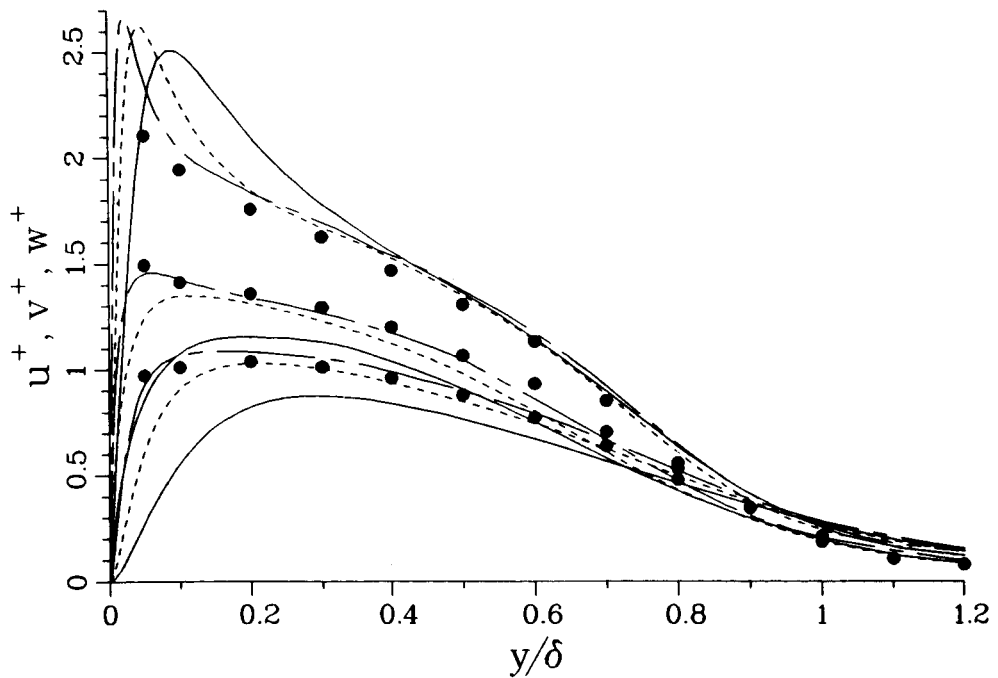


Figure 10. Turbulence intensities. Upper curve u_{rms}/u_τ ; lower curve v_{rms}/u_τ ; middle curve w_{rms}/u_τ . — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$. \bullet $R_\theta \approx 7500$ (Klebanoff 1954).

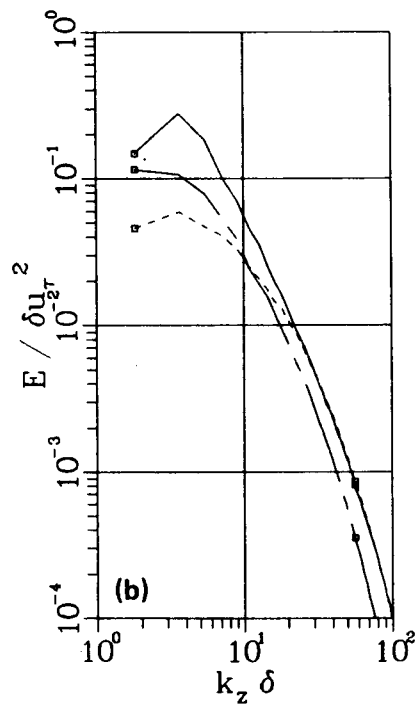
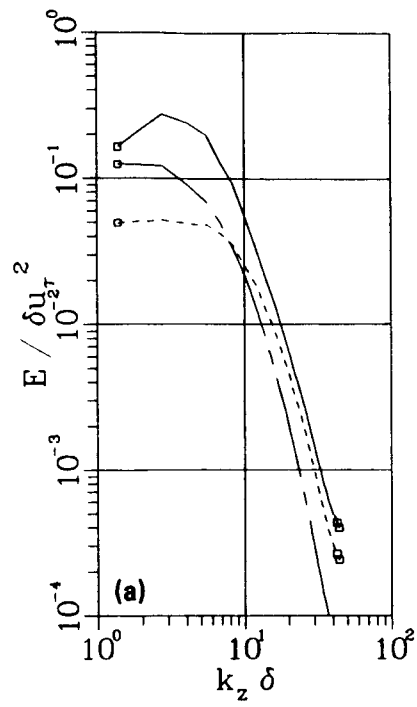


Figure 11. Spectra at $y = \delta/2$. — $\langle u^2 \rangle$; --- $\langle v^2 \rangle$; - - - $\langle w^2 \rangle$. a) $R_\theta = 300$; b) $R_\theta = 1410$.

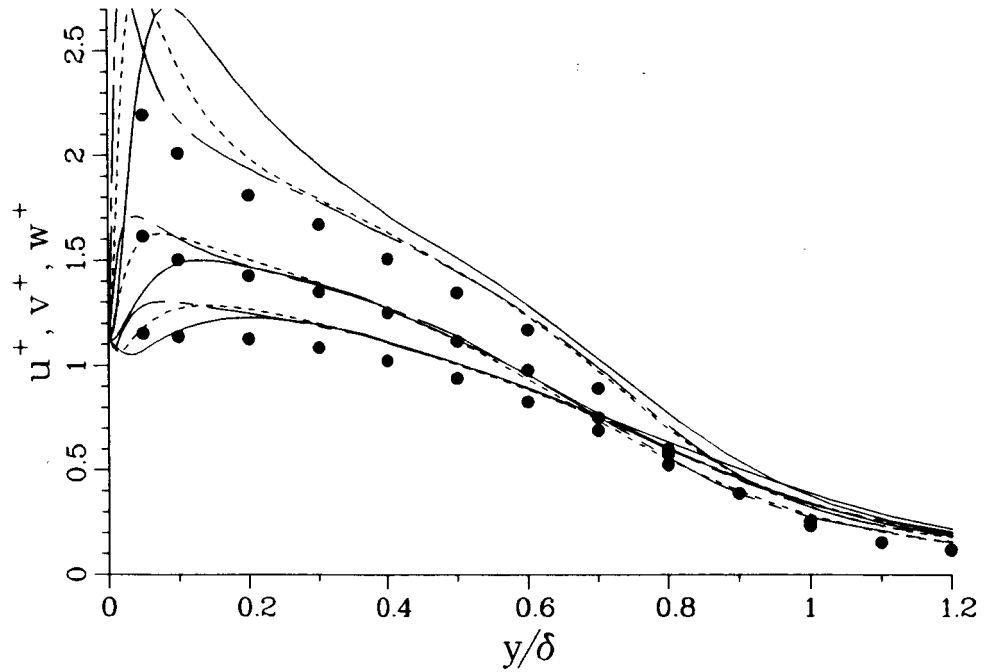


Figure 12. Turbulence intensities, corrected to infinite Reynolds number. Upper curve u_{rms}/u_τ ; lower curve v_{rms}/u_τ ; middle curve w_{rms}/u_τ . — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$. • $R_\theta \approx 7500$ (Klebanoff 1954).

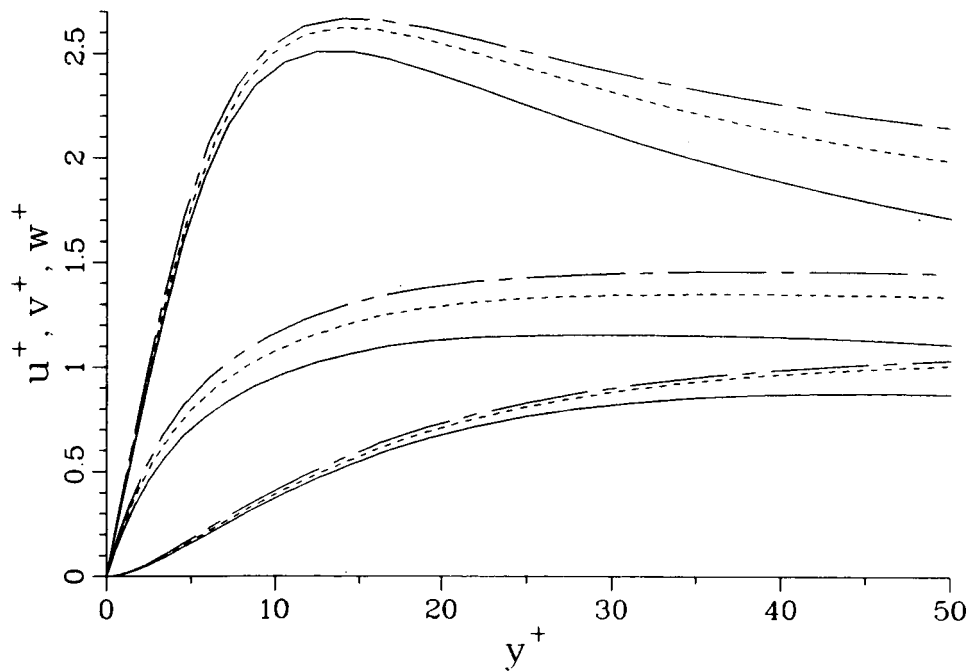


Figure 13. Turbulence intensities. Upper curve u_{rms}/u_τ ; lower curve v_{rms}/u_τ ; middle curve w_{rms}/u_τ . — $R_\theta = 300$; - - - $R_\theta = 670$; - · - $R_\theta = 1410$.

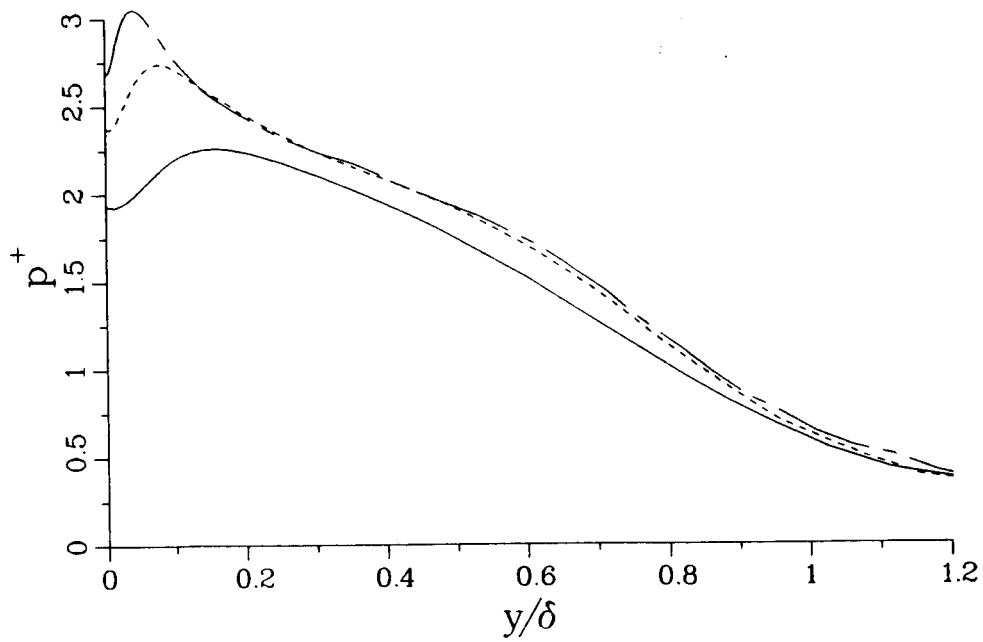


Figure 14. Pressure fluctuations. — $R_\theta = 300$; - - - $R_\theta = 670$; - · - · $R_\theta = 1410$.

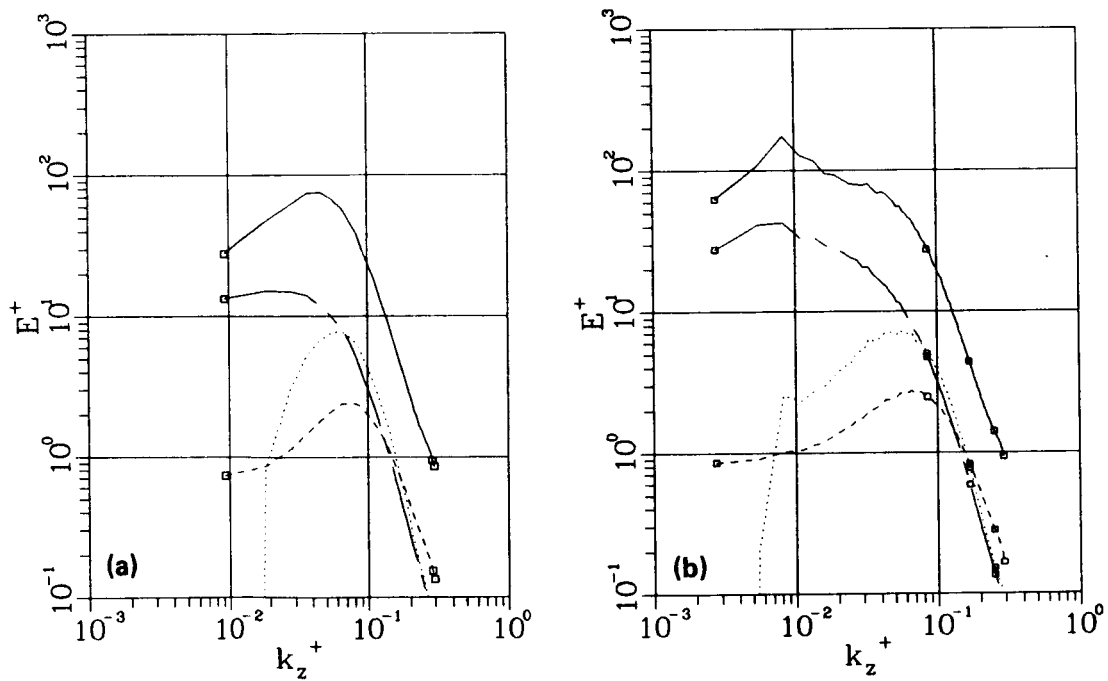


Figure 15. Spectra at $y^+ = 15$. — $\langle u^2 \rangle$; - - - $\langle v^2 \rangle$; - · - · $\langle w^2 \rangle$; ... — $\langle uv \rangle$.
a) $R_\theta = 300$; b) $R_\theta = 1410$.

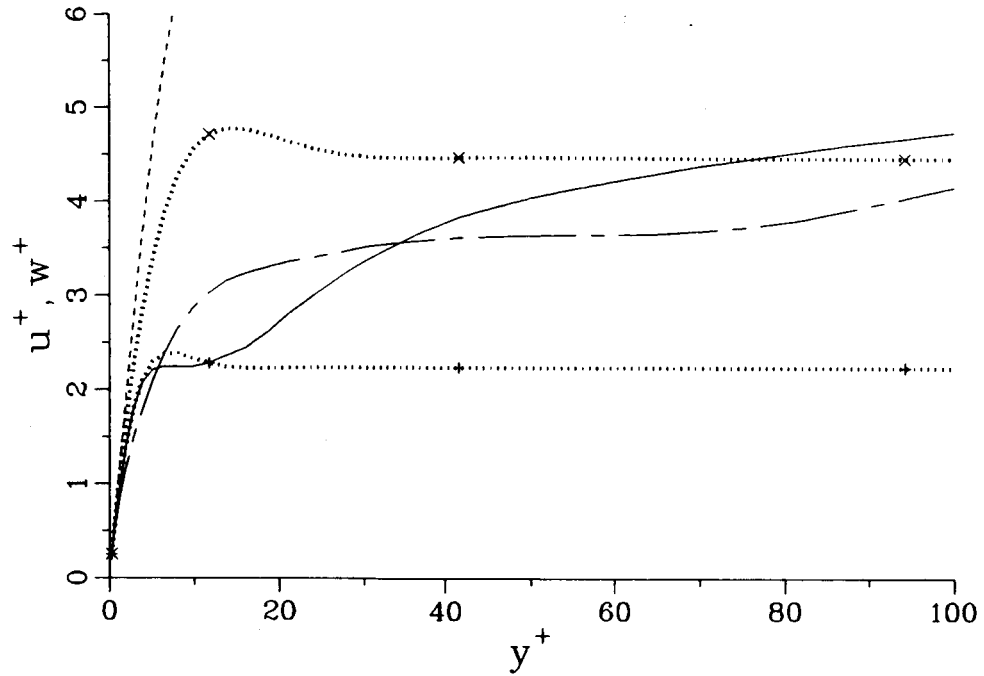


Figure 16. Profiles of inactive-motion rms. Energy difference between $R_\theta = 670$ and 1410: — $\langle u^2 \rangle$, - - - $\langle w^2 \rangle$. Stokes-layer model: + $n^+ = 0.2$, $\times n^+ = 0.05$. - - - law-of-the-wall model.

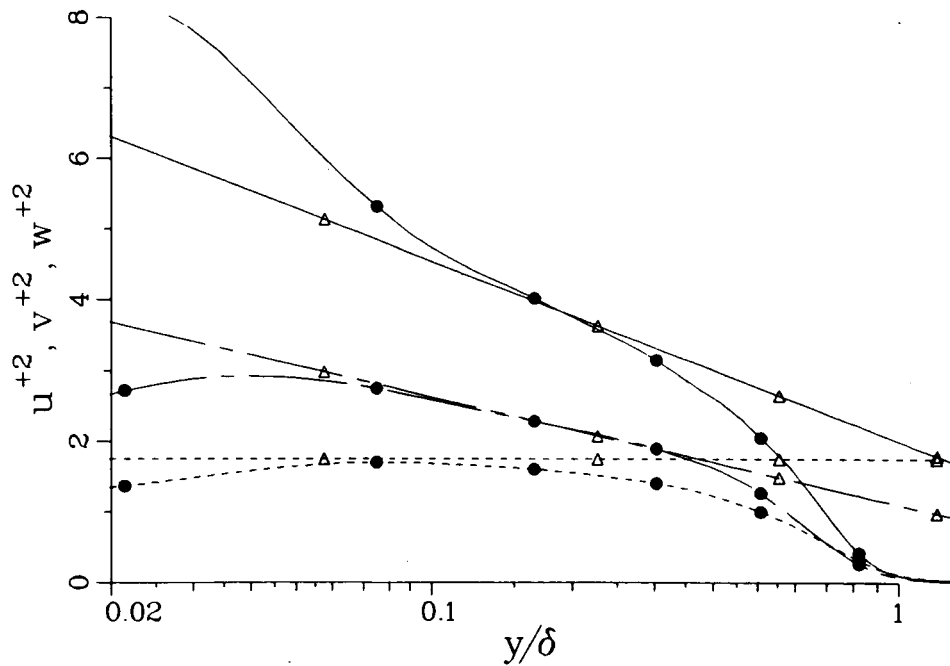


Figure 17. Reynolds stresses, extrapolated from $R_\theta = 1410$ to ∞ . — u^{+2} ; - - - v^{+2} ; - · - w^{+2} . • computed values; Δ equation (11).

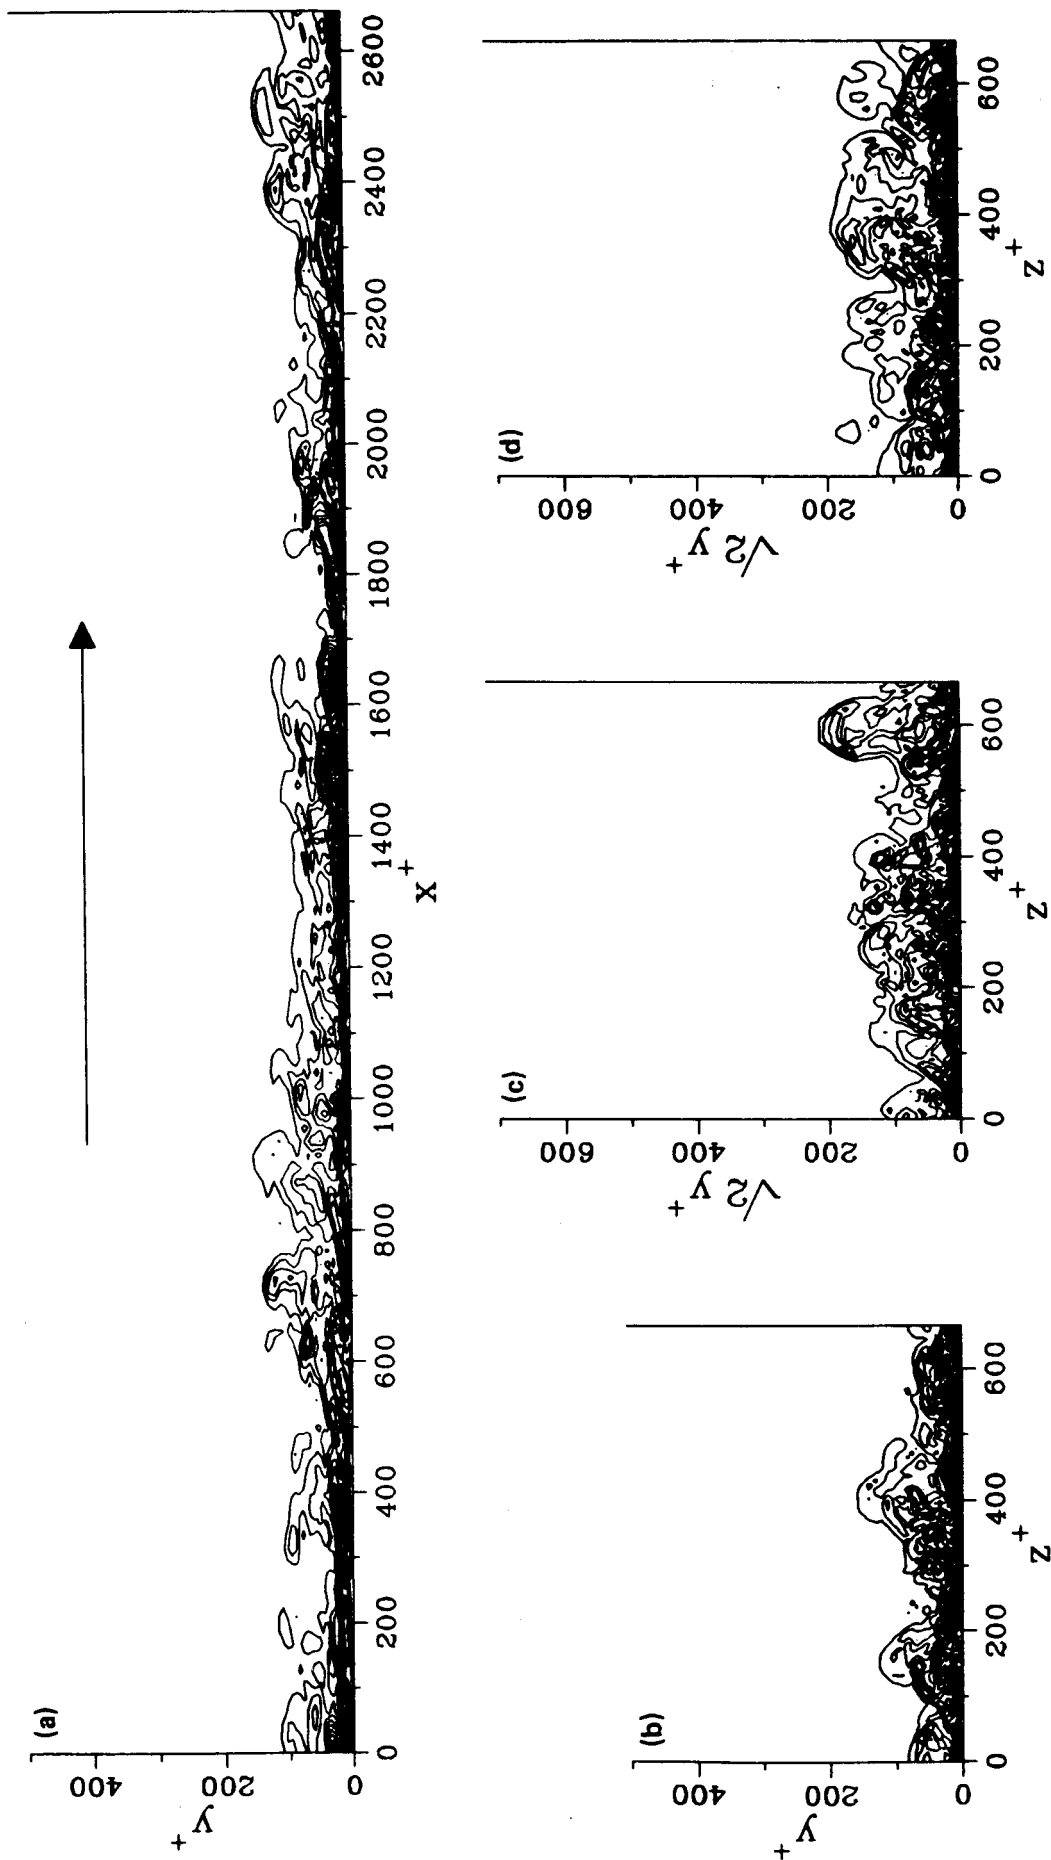


Figure 18. Vorticity contours, $R_\theta = 300$. a) streamwise plane; b) spanwise plane; c) downstream plane; d) upstream plane.

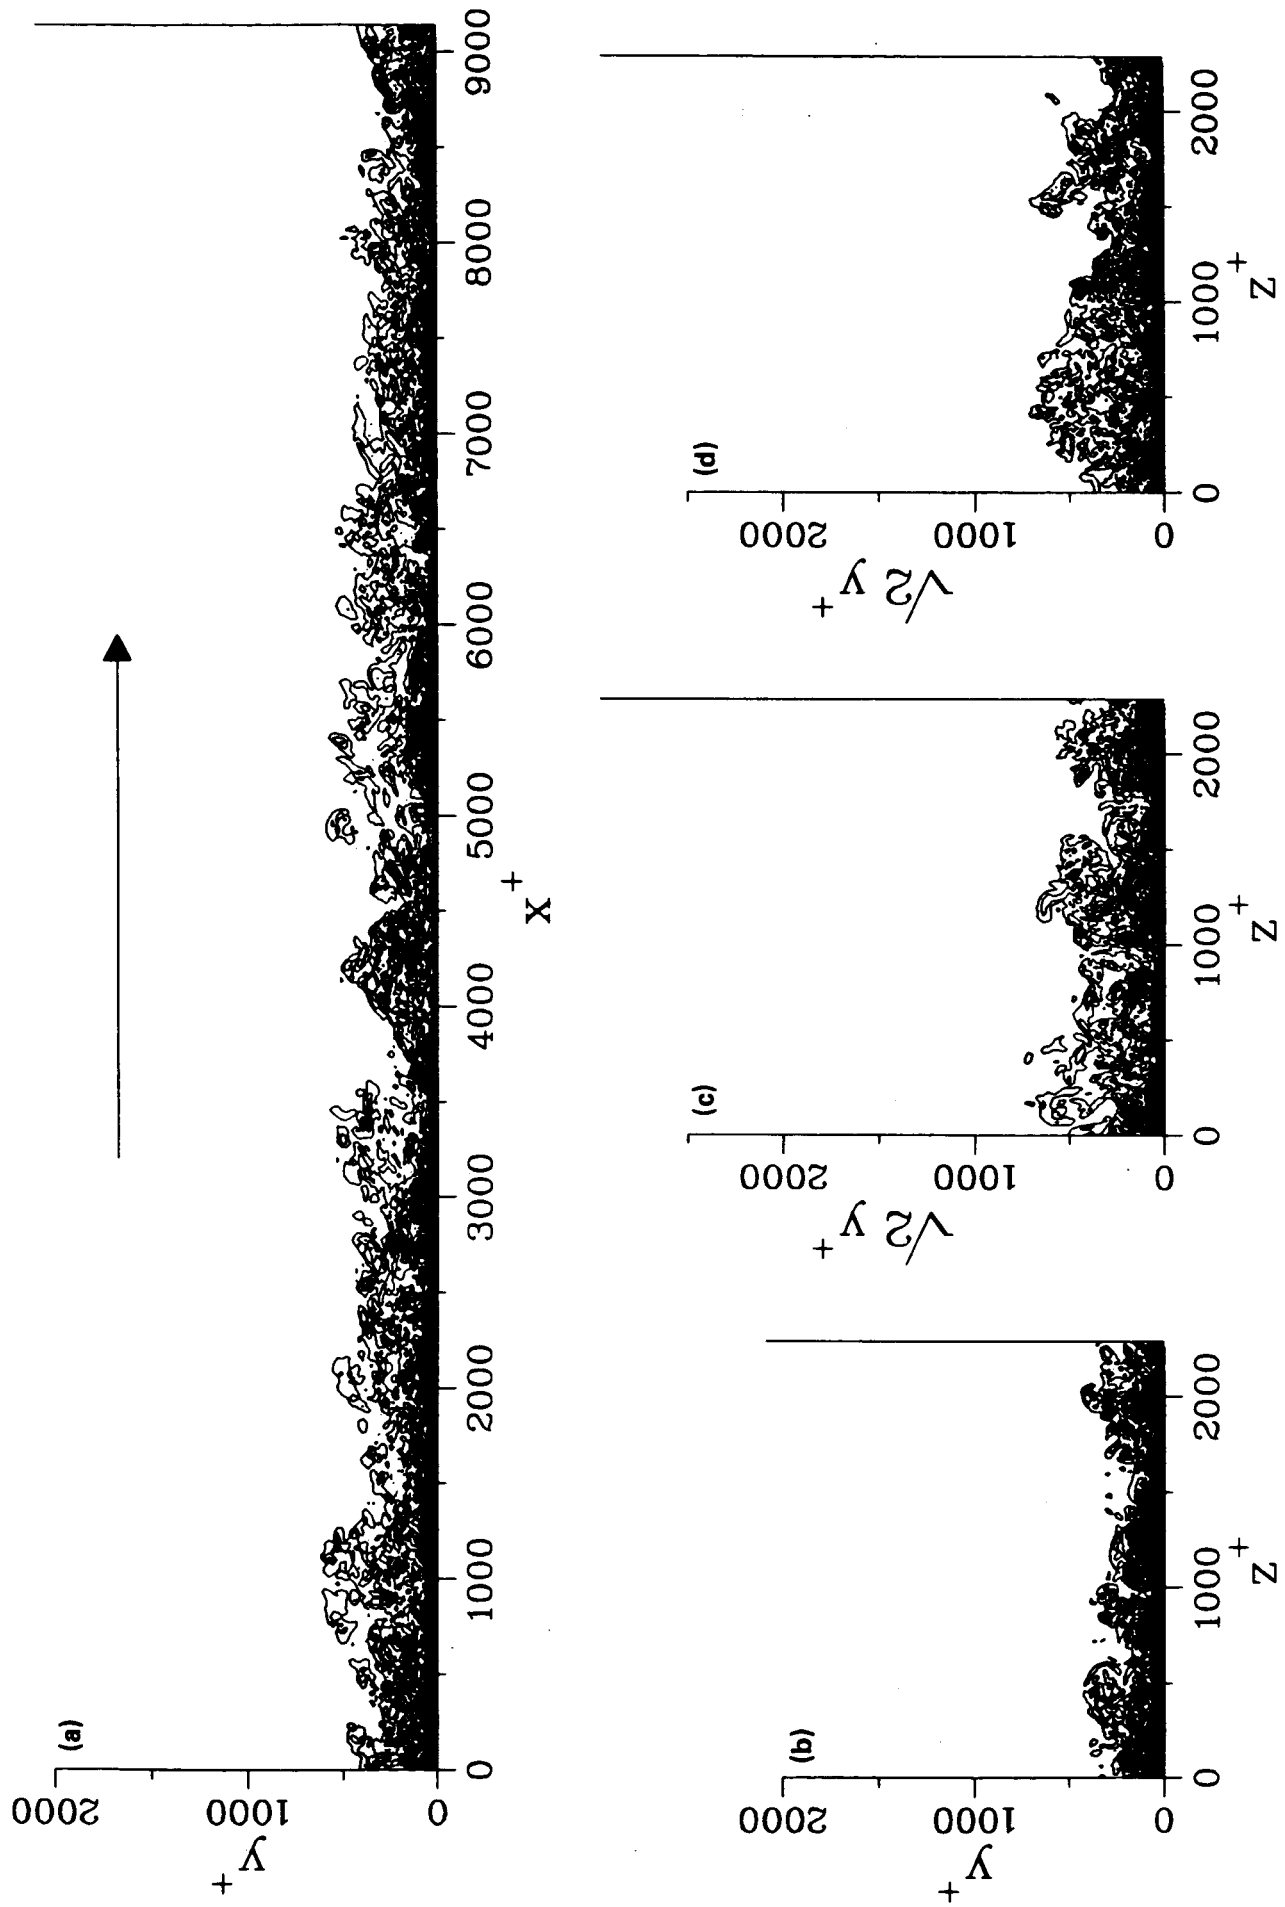


Figure 19. Vorticity contours, $R_\theta = 1410$. a) streamwise plane; b) spanwise plane; c) downstream plane; d) upstream plane.

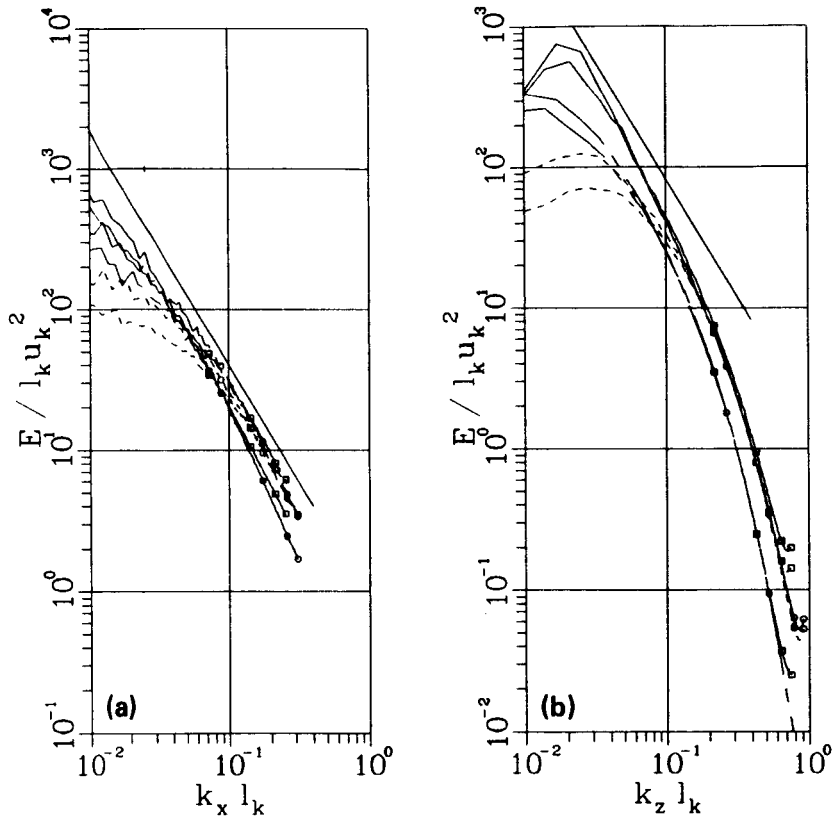


Figure 20. Spectra, Kolmogorov scaling. a) x direction; b) z direction. — $\langle u^2 \rangle$,
 --- $\langle v^2 \rangle$, - - - $\langle w^2 \rangle$. \square $y^+ = 100$; \circ $y^+ = 200$.

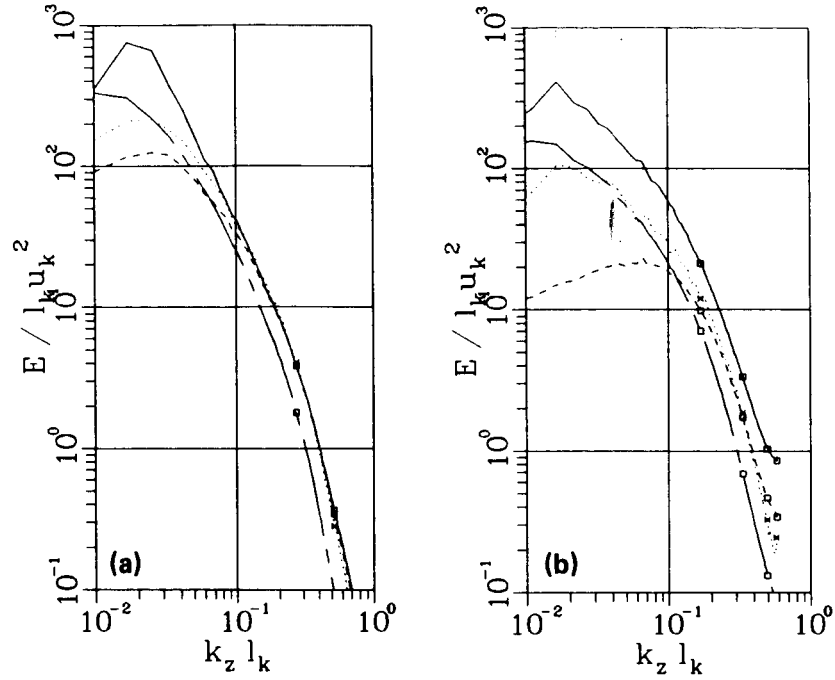


Figure 21. Spectra, Kolmogorov scaling, test of local isotropy. a) $y^+ = 200$; b) $y^+ = 40$.
 — $\langle u^2 \rangle$; - - - $\langle v^2 \rangle$; ···· $\langle w^2 \rangle$; ... $(E_1 - k_1 dE_1/dk_1)/2$.

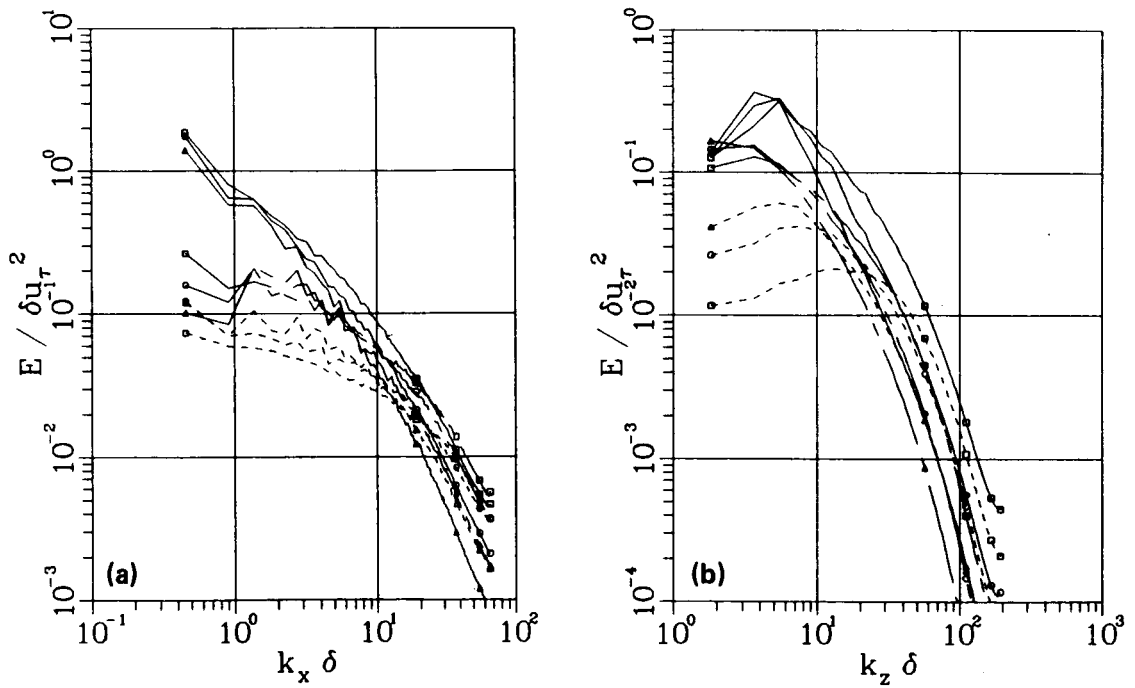


Figure 22. Spectra, normalized using δ . a) x direction; b) z direction. — $\langle u^2 \rangle$,
 - - - $\langle v^2 \rangle$; ···· $\langle w^2 \rangle$. \square $y^+ = 50$; \circ $y^+ = 100$; \triangle $y^+ = 200$.

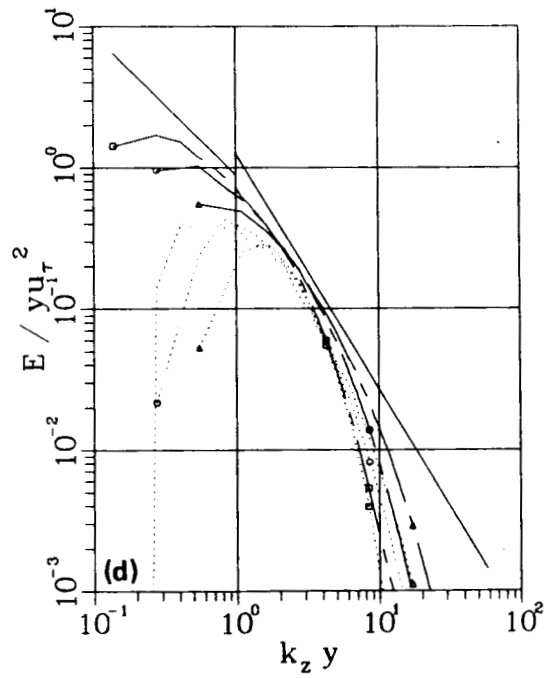
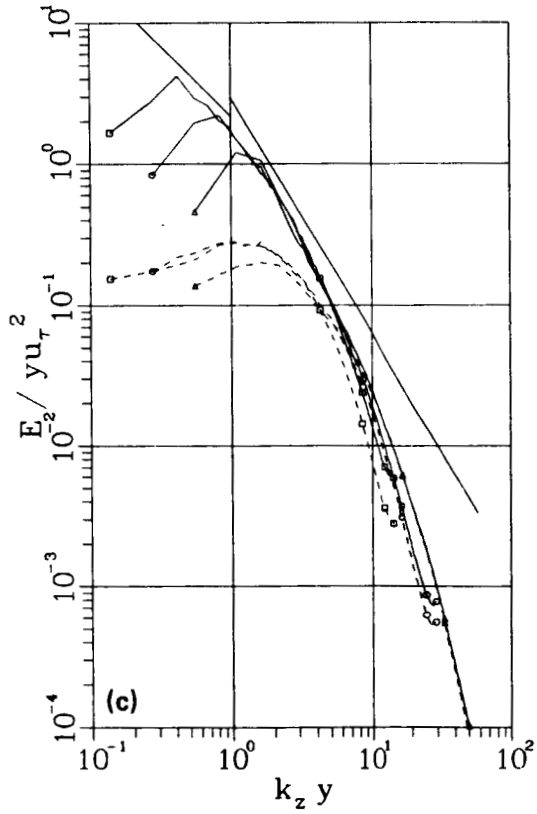
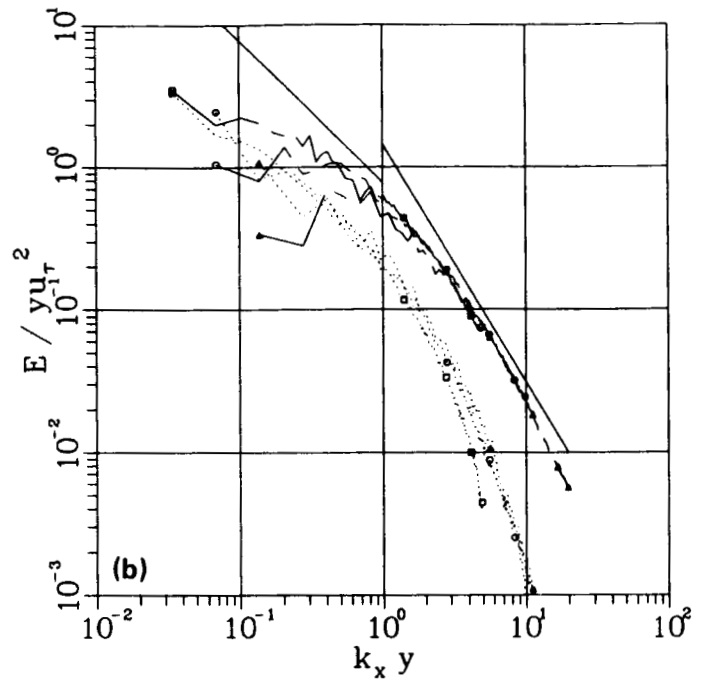
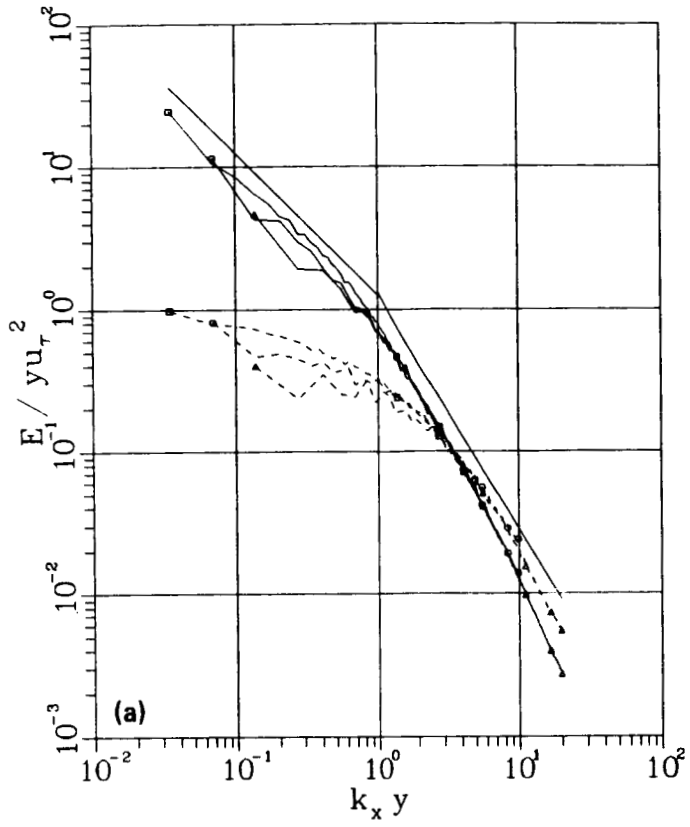


Figure 23. Spectra, normalized using y . a) x direction; — $\langle u^2 \rangle$; --- $\langle v^2 \rangle$. b) x direction; - - - $\langle w^2 \rangle$; ... $\langle uv \rangle$. c) z direction; — $\langle u^2 \rangle$; --- $\langle v^2 \rangle$. d) z direction; - - - $\langle w^2 \rangle$; ... $\langle uv \rangle$. $\square y^+ = 50$; $\circ y^+ = 100$; $\triangle y^+ = 200$.

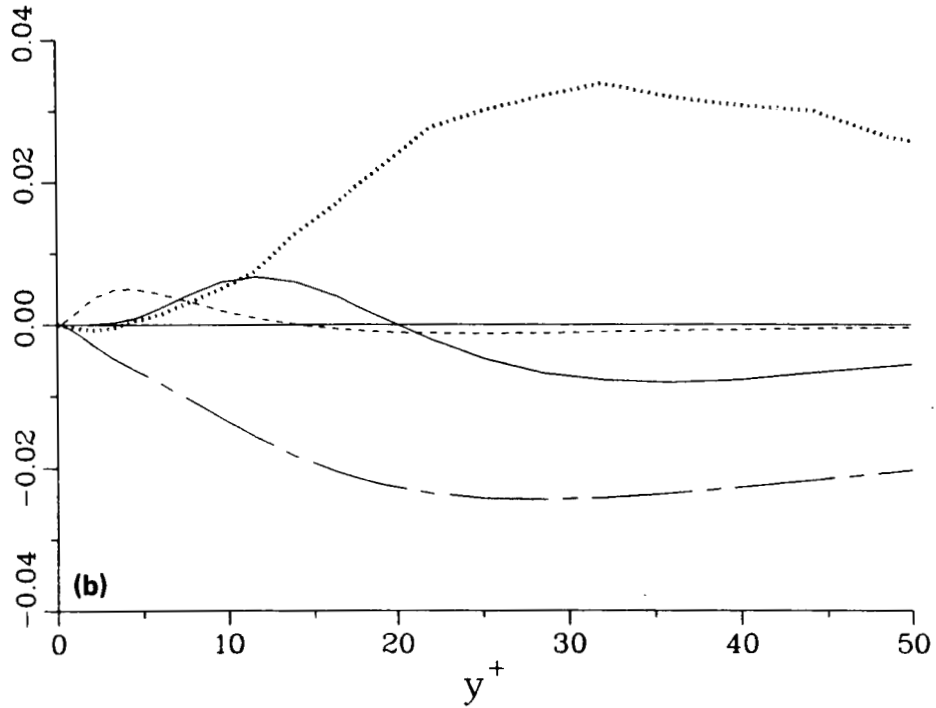
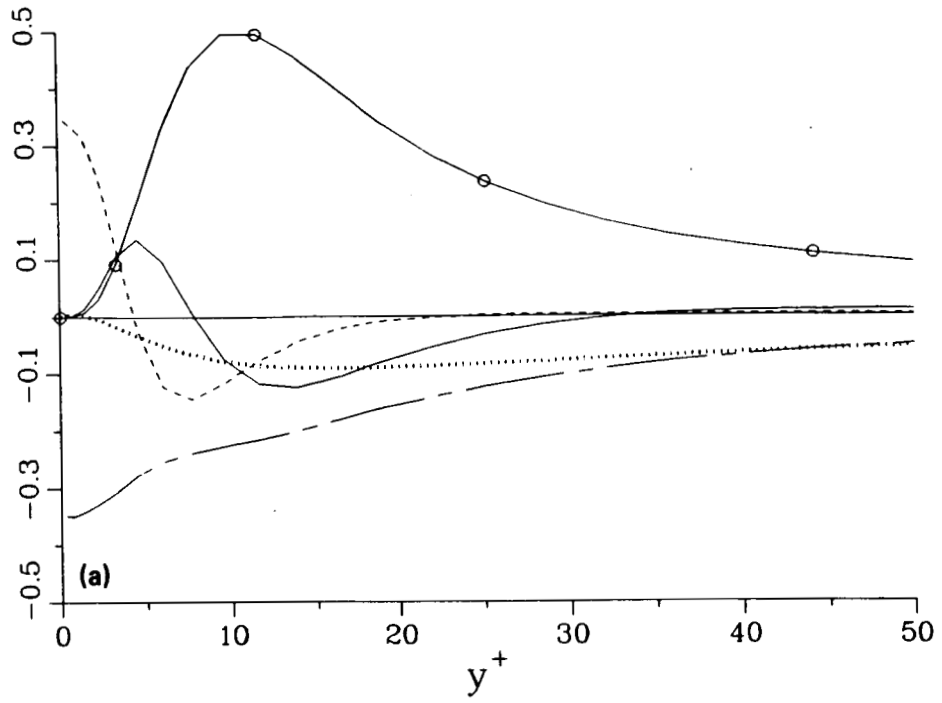


Figure 24. Reynolds-stress budget near wall. a) u^2 ; b) v^2 ; c) w^2 ; d) $-uv$; e) $u^2 + v^2 + w^2$. -o- production; — turbulent diffusion; - - - viscous diffusion; - — - dissipation; ... pressure.

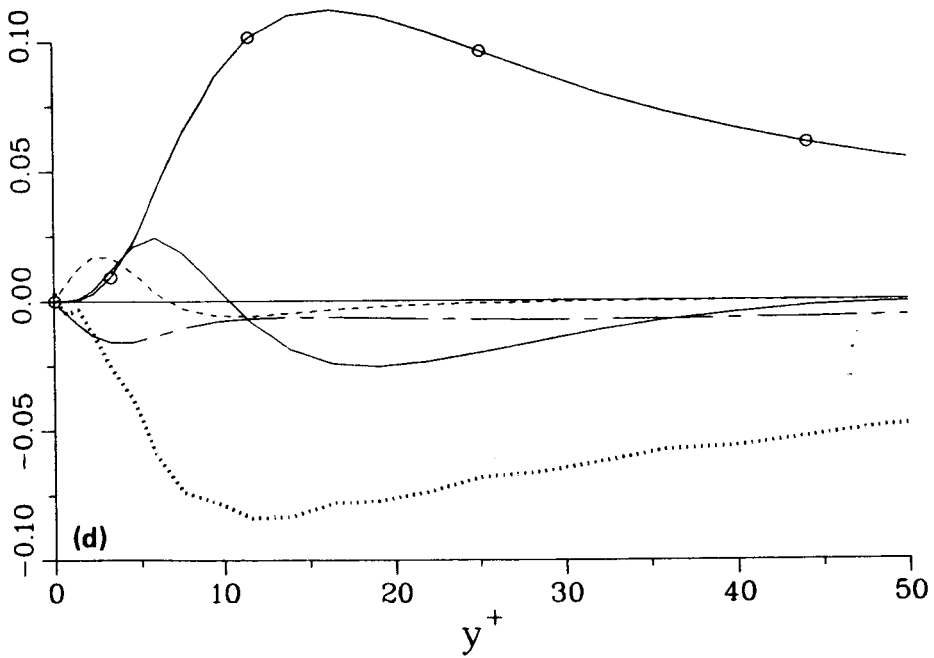
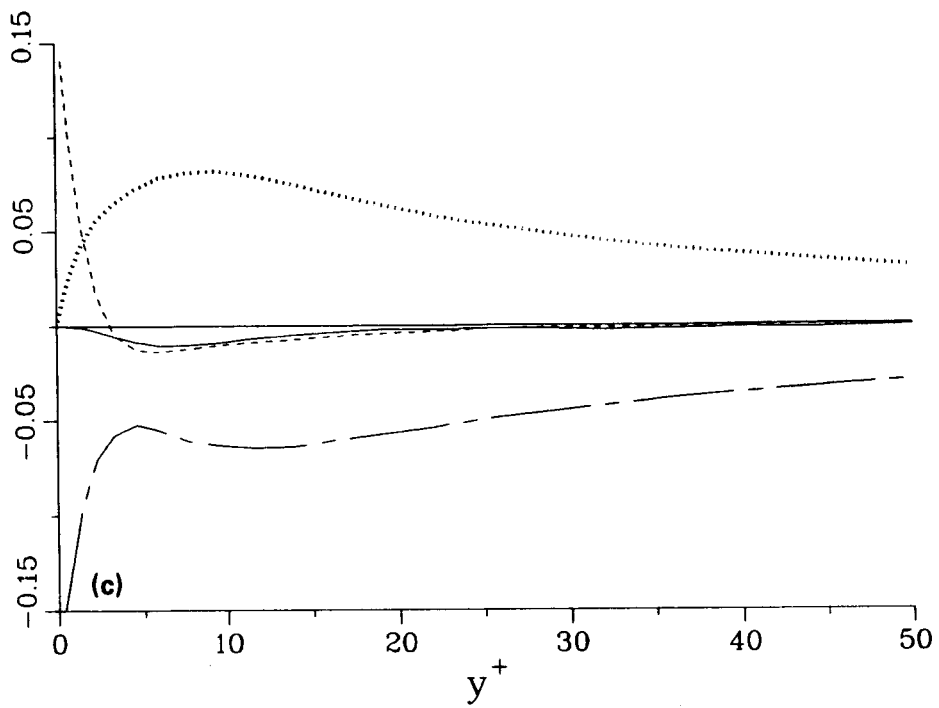


Figure 24. Continued.

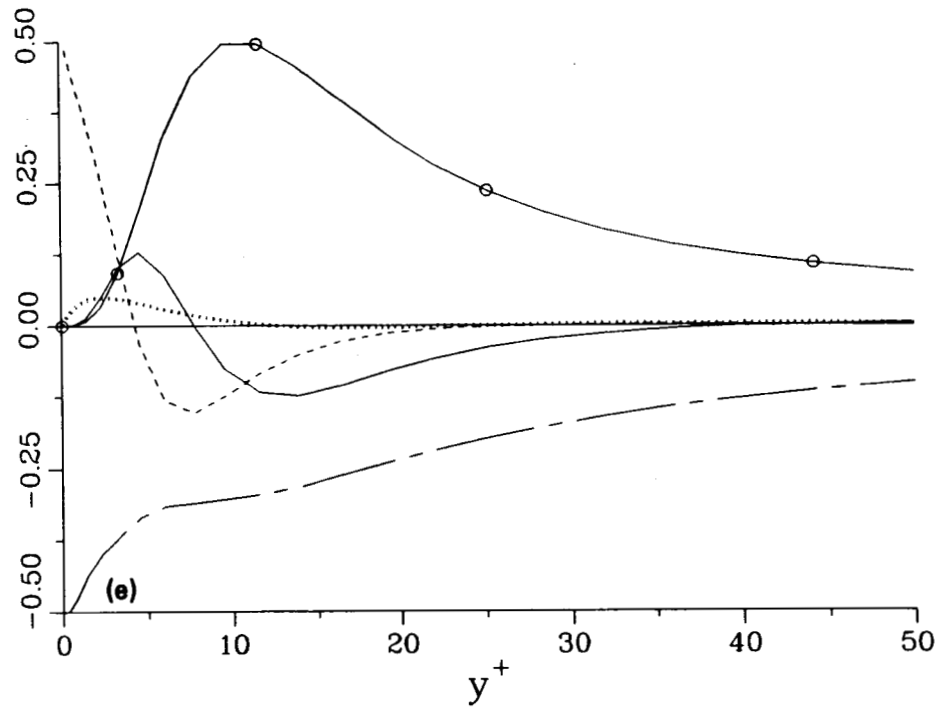


Figure 24. Concluded.

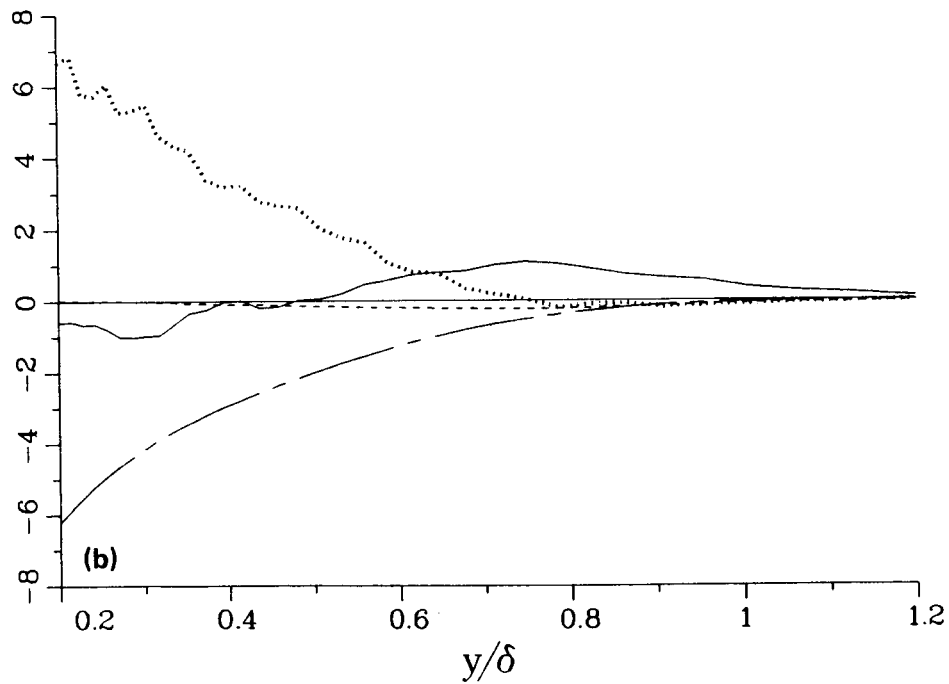
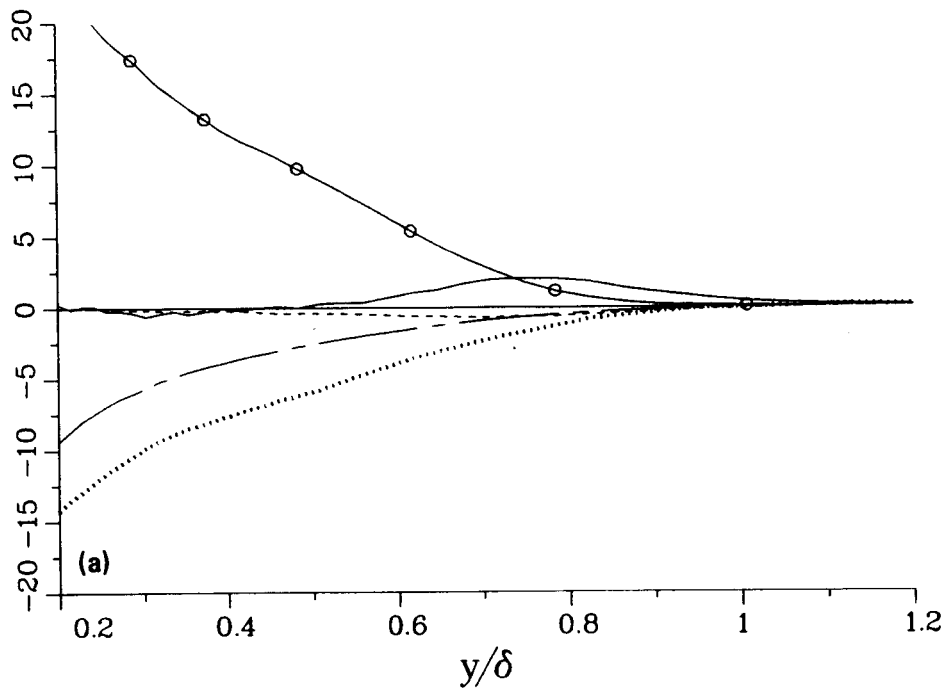


Figure 25. Reynolds-stress budget away from the wall. a) u^2 ; b) v^2 ; c) w^2 ; d) $-uv$; e) $u^2 + v^2 + w^2$. -o- production; — turbulent diffusion; - - - growth terms; - · - · - dissipation; ... pressure.

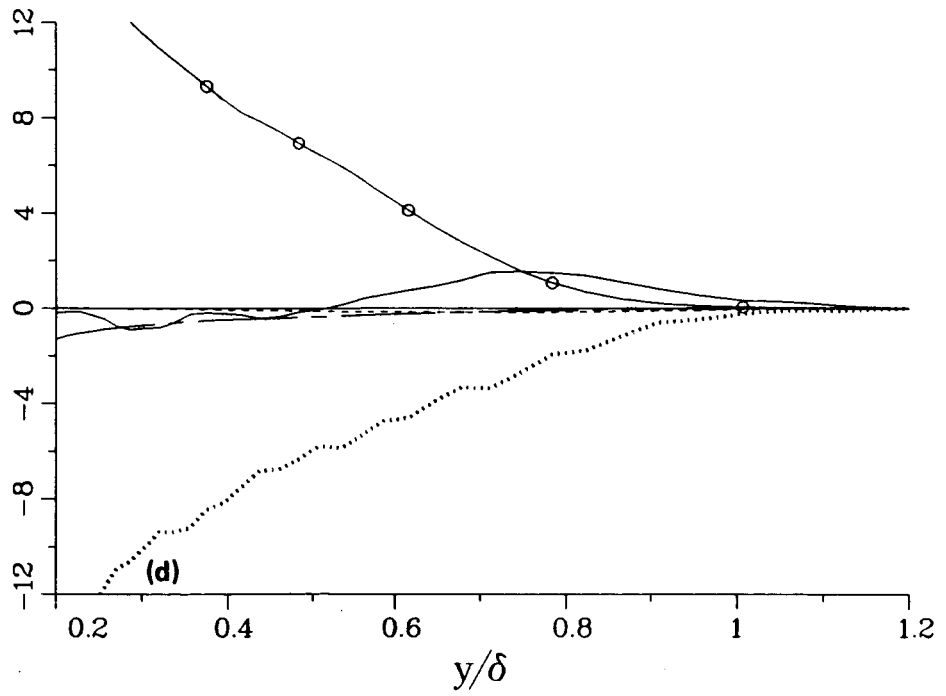
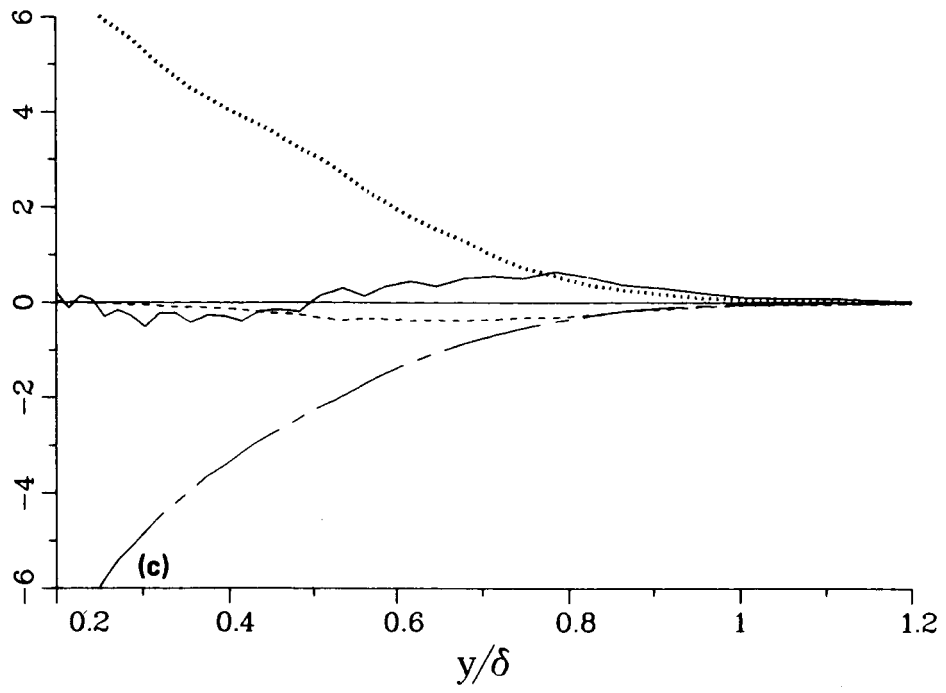


Figure 25. Continued.

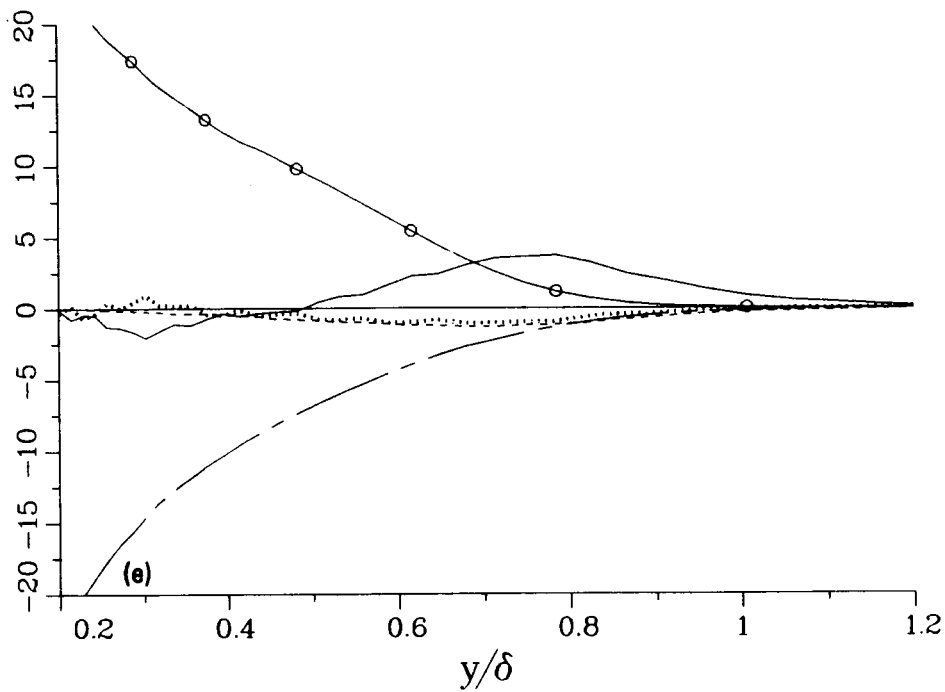


Figure 25. Concluded.



Report Documentation Page

1. Report No. NASA TM-89407		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle DIRECT SIMULATION OF A TURBULENT BOUNDARY LAYER UP TO $R_0 = 1410$			5. Report Date December 1986		
			6. Performing Organization Code		
7. Author(s) Philippe R. Spalart			8. Performing Organization Report No. A-87016		
			10. Work Unit No.		
9. Performing Organization Name and Address Ames Research Center Moffett Field, CA 94035			11. Contract or Grant No.		
			13. Type of Report and Period Covered Technical Memorandum		
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546			14. Sponsoring Agency Code 505-31-01		
			15. Supplementary Notes Point of Contact: Philippe R. Spalart, Ames Research Center, M/S 202-1 Moffett Field, CA 94035 (415) 694-6667 or FTS 464-6667		
16. Abstract <p>The turbulent boundary layer on a flat plate, with zero pressure gradient, is simulated numerically at four stations between $R_0 = 225$ and $R_0 = 1410$. The three-dimensional time-dependent Navier-Stokes equations are solved using a spectral method with up to about 10^7 grid points. Periodic spanwise and streamwise conditions are applied, and a multiple-scale procedure is applied to approximate the slow streamwise growth of the boundary layer. The flow is studied, primarily, from a statistical point of view. The solutions are compared with experimental results. The scaling of the mean and turbulent quantities with Reynolds number is examined and compared with accepted laws, and the significant deviations are documented. The turbulence at the highest Reynolds number is studied in detail. The spectra are compared with various theoretical models. Reynolds-stress budget data are provided for turbulence-model testing.</p>					
17. Key Words (Suggested by Author(s)) Turbulence Boundary layer Numerical simulation			18. Distribution Statement Unclassified-Unlimited Subject Category - 34		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of pages 50	22. Price A03